Remington®

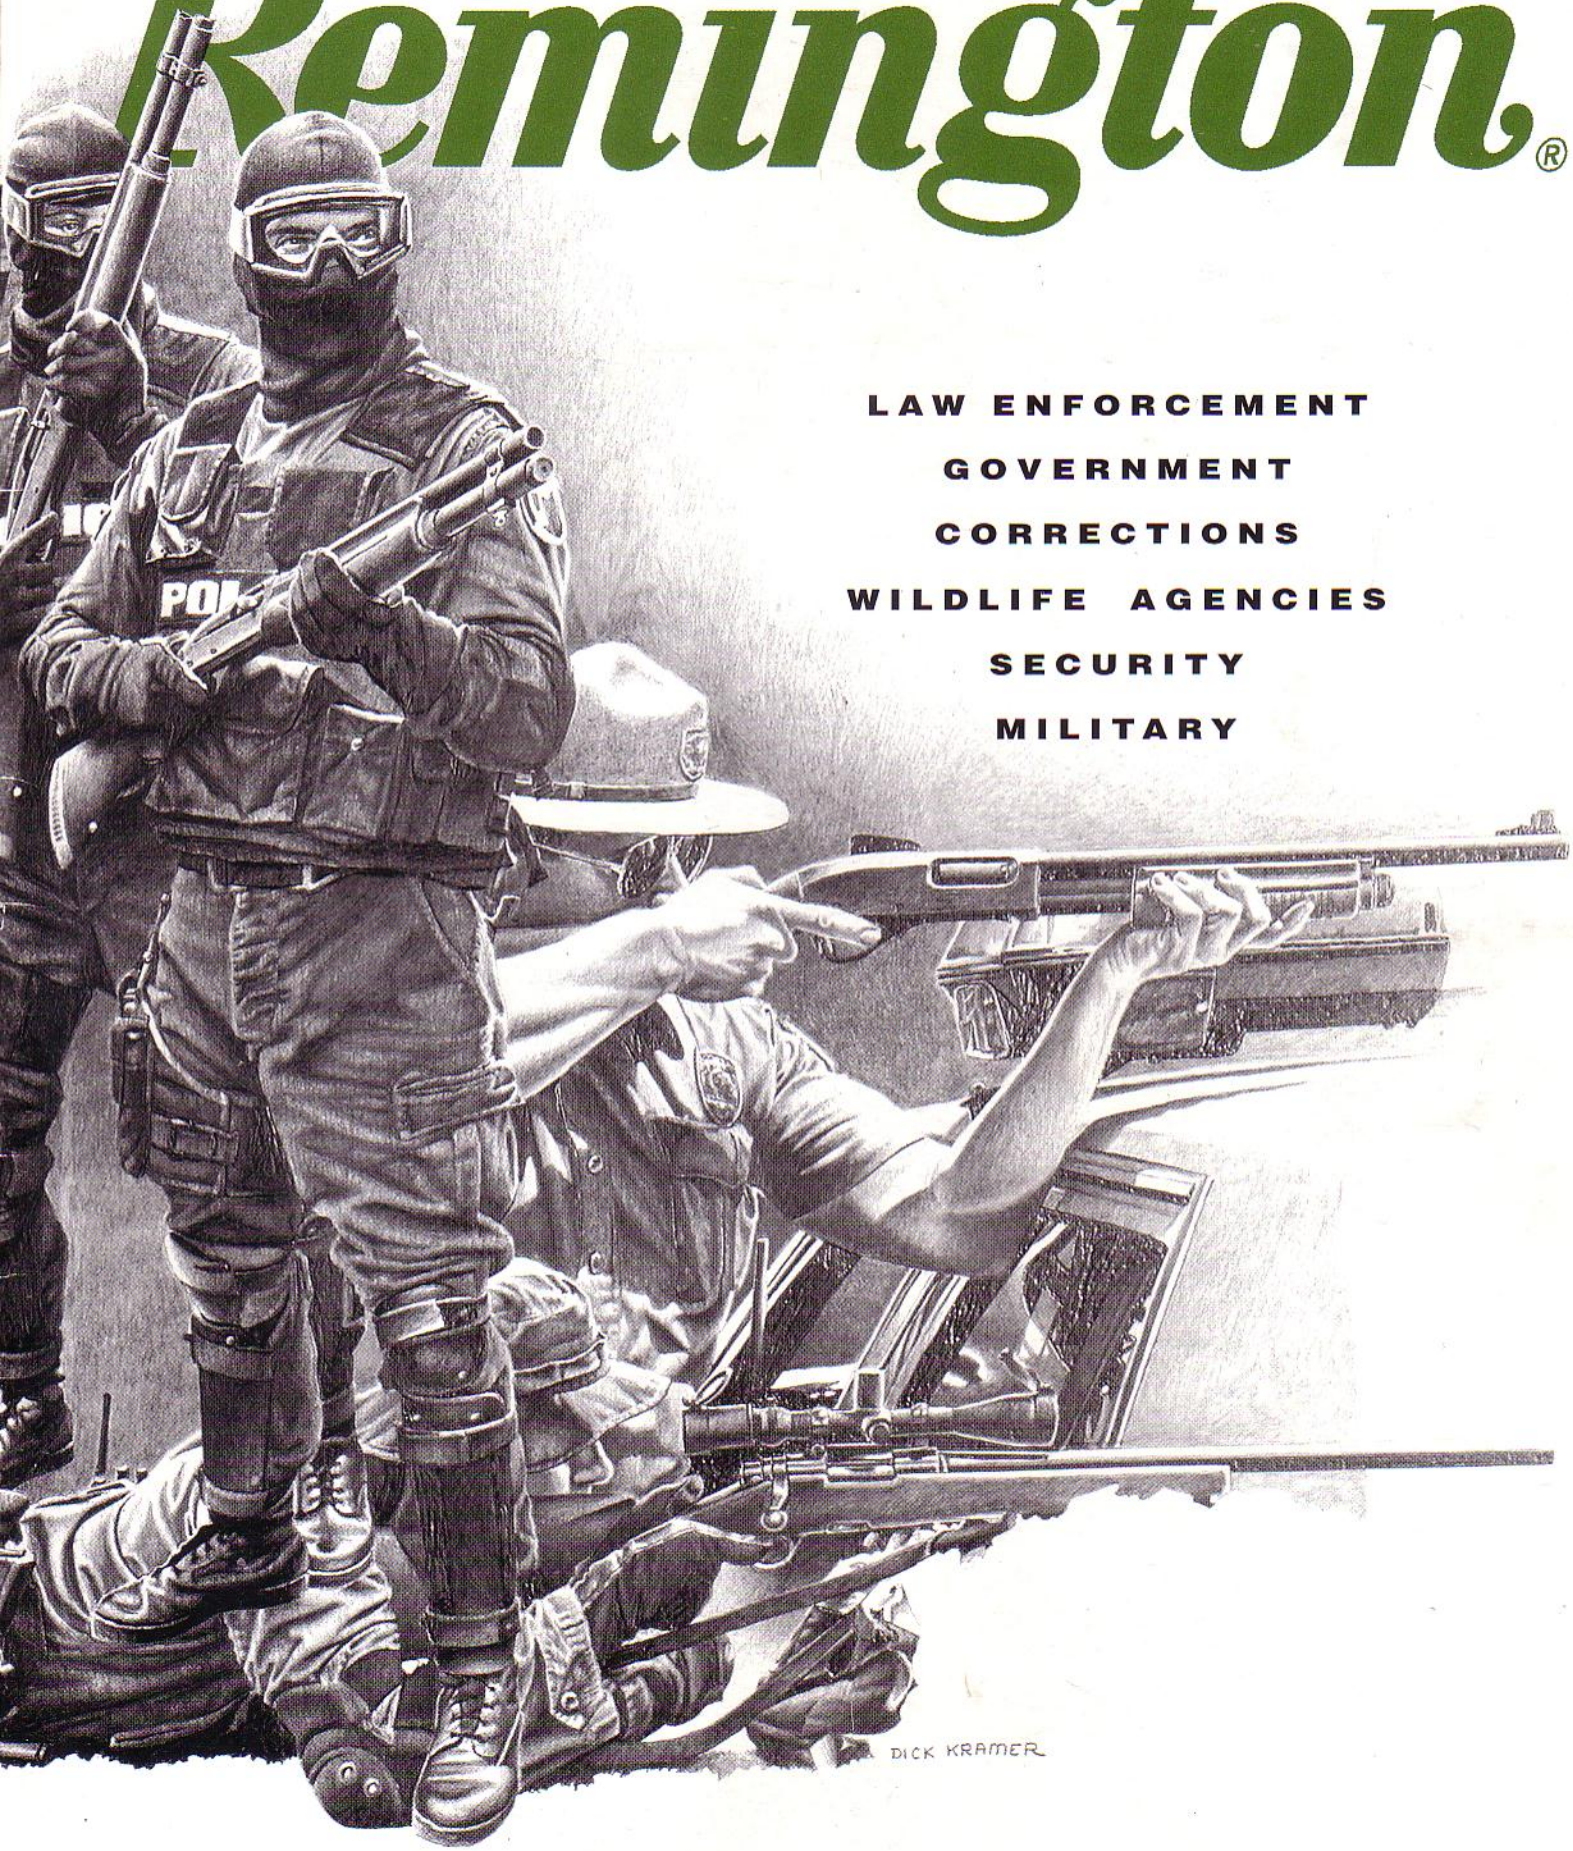

LAW ENFORCEMENT

GOVERNMENT

CORRECTIONS

WILDLIFE AGENCIES

SECURITY

MILITARY

Today, the only thing that hasn't changed is law enforcement's standard of excellence.

The challenges facing today's law enforcement officer have never been greater. And the demands on the tools of law enforcement—the officer's firearms and ammunition—never more critical.

That's why you work to standards of excellence. And we work to standards of our own. Standards of uncompromised quality. Of utterly unfailing performance. Of unrelenting consistency that law enforcement officers can count on.

With ongoing improvements and enhancements, Remington firearms and ammunition enable you to keep pace with a rapidly changing world.

In this catalog, you'll see the results of our efforts. Our shotguns, rifles, ammunition and accessories, all designed especially for law enforcement, security, and government agencies. Together they offer you an unmatched combination of versatility, dependability and high performance.

That's why Remington is The Law Enforcement Standard.

TABLE OF CONTENTS

Model 870P Shotguns	3, 4-5
Model 11-87P Shotguns	6-7
Model 700P Law Enforcement Rifles	8-9
Remington Handgun Ammunition	10-15
Remington Centerfire Rifle Ammunition	16-17
Remington Rimfire Ammunition	17
Remington Shotshell Ammunition	18
Remington Gun Care Products	19
Remington Armorer's Training	20

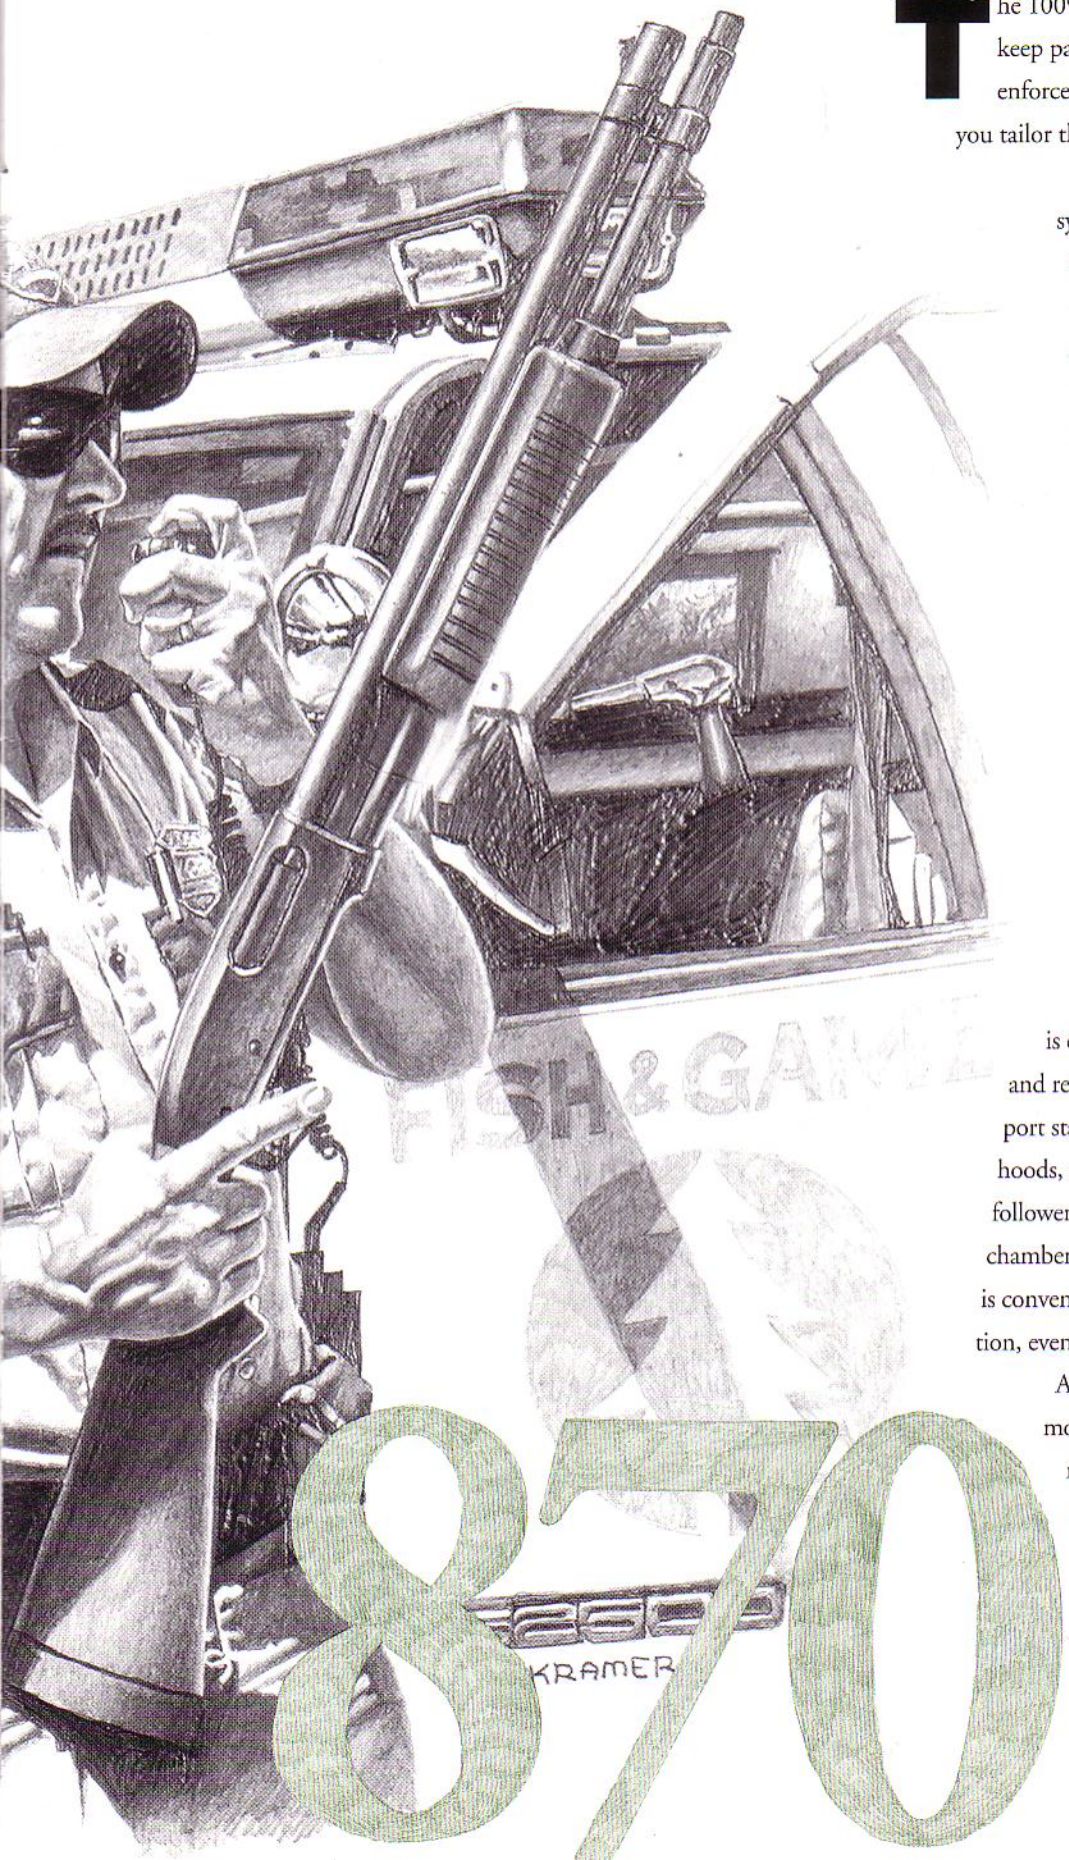

The 100% American-made Model 870 has evolved to keep pace with the rapidly changing needs of law enforcement. A wide range of accessory options lets you tailor this shotgun to your specific requirements.

Choose from wood, folding metal or synthetic stocks. Blued or parkerized finishes. Magazine extensions for added firepower and quick-change barrels. Choice of bead, rifle, or ghost ring sights. The Remington-produced, "ghost ring" sighting system continues to enhance an officer's shooting ability. To simplify field maintenance, all parts and assemblies are interchangeable, gun to gun. The trigger plate assembly is quickly and easily removed for inspection and cleaning. Double action bars deliver the smoothest, surest operation in the business. The breech bolt locks into the heat-treated barrel extension forming a rock solid assembly with constant head space.

The Model 870 abounds in safety and performance features. A uniquely designed action with balanced sear—plus inertia firing pin—prevents firing unless the action is completely closed and the trigger is squeezed and released after each shot. The large side-ejection port stays unobstructed when shooting over walls, car hoods, and other barriers; the blaze orange magazine follower also permits quick safe inspection of the chamber and magazine. The positive, cross-bolt safety is conveniently located near the trigger for fast operation, even while wearing gloves.

A recoil pad on the wood and synthetic stock models, and a rubber butt pad on the folding-stock model, permits greater control by eliminating slippage while firing. The grooved, steel-lined fore-end provides a better grip. And sling swivel studs come standard on all 870s.

Add it all up and it's no wonder the Model 870 continues to be the system of choice. Nationwide.

DICK KRAMER

MODEL 870 WITH FOLDING STOCK

TACTICAL MODEL 870P

MODEL 870 WITH 14" BARREL

When space is limited, or concealment a must, the folding stock Model 870 is the best way to go. Overall length of the shotgun is reduced by 10". The metal stock folds and extends at the push of a button. Can also be fired in the folded position.

STOCK	BARREL LENGTH	CHOKE*	SIGHTS	FINISH	ORDER NO.
METAL, FOLDING	20"	IMPROVED CYLINDER	RIFLE	PARKERIZED	4807
METAL, FOLDING	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	4905
SYNTHETIC	14"	MODIFIED	BEAD	PARKERIZED	4917†

†The sale of 14" barrels and guns must comply with BATF Regulations.

WOOD STOCKS

MODEL 870 WITH RIFLE SIGHT, PARKERIZED

MODEL 870 WITH RIFLE SIGHTS, PARKERIZED, MAGAZINE EXTENSION

MODEL 870 WITH BEAD SIGHT, BLUED

MODEL 870 WITH BEAD SIGHT, PARKERIZED, MAGAZINE EXTENSION

The most traditional Model 870 police shotguns have a walnut stock and fore-end with a blued or parkerized metal finish. The Model 870's receiver is machined from a solid block of ordnance steel for the longest possible service life. Its 3" chamber accepts all 2¾" and 3" 12-ga. shells. A Flexitab™ feeding system makes loading more positive and easier than ever.

STOCK	BARREL LENGTH	CHOKE*	SIGHTS	FINISH	ORDER NO.
WOOD	18"	IMPROVED CYLINDER	RIFLE	PARKERIZED	5015
WOOD	20"	IMPROVED CYLINDER	BEAD	BLUED	4896
WOOD	20"	IMPROVED CYLINDER	BEAD	PARKERIZED	4897
WOOD	18"	IMPROVED CYLINDER	BEAD	BLUED	4899
WOOD	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	4901
WOOD	20" (8 SHOT EXT.)	IMPROVED CYLINDER	RIFLE	PARKERIZED	4888
WOOD	18" (7 SHOT EXT.)	IMPROVED CYLINDER	BEAD	PARKERIZED	4903

SYNTHETIC STOCKS

MODEL 870 WITH SPEEDFEED I STOCK

MODEL 870 WITH SOLID SYNTHETIC STOCK

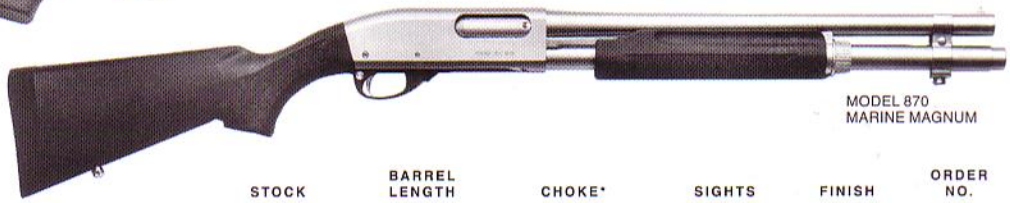

MODEL 870 MARINE MAGNUM

Virtually indestructible synthetic stocks are the best choice when weather extremes are a factor. The Davis SPEEDFEED® I stock has two magazine tubes that hold four additional rounds molded into it. The Remington synthetic solid stock and fore-end duplicate the weight and dimensions of the factory wood.

Our corrosion-resistant shotgun is the Model 870 Marine Magnum. Severe salt fog tests indicate that this shotgun should outperform standard shotgunns three to one in harsh, corrosive environments. Metal parts are electroless-nickel plated; key fire control components are plated with a unique combination of electroless nickel and PTFE (Teflon®).

The 870 Tower™ gun, with its 28" full choke barrel, is designed for use by correctional facilities.

REMINGTON OUTFITS THE 870P WITH OPTIONAL TRITIUM BEAD AND RIFLE SIGHTS FOR INCREASED EFFICIENCY IN LOW LIGHT CONDITIONS.

STOCK	BARREL LENGTH	CHOKE*	SIGHTS	FINISH	ORDER NO.
REMINGTON SYNTHETIC	18"	IMPROVED CYLINDER	RIFLE	PARKERIZED	4909
SPEEDFEED I	20"	IMPROVED CYLINDER	RIFLE	PARKERIZED	5045
SPEEDFEED I	20"	IMPROVED CYLINDER	BEAD	PARKERIZED	4913
SPEEDFEED I	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	4915
REMINGTON SYNTHETIC	20"	IMPROVED CYLINDER	RIFLE	PARKERIZED	4891
REMINGTON SYNTHETIC	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	4907
REMINGTON SYNTHETIC	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	4910
MARINE MAGNUM	18"	CYLINDER	BEAD	ELECTROLESS NICKEL	5012
REMINGTON SYNTHETIC	18"	IMPROVED CYLINDER	TRITIUM BEAD	PARKERIZED	4911
REMINGTON SYNTHETIC	20"	IMPROVED CYLINDER	TRITIUM RIFLE	PARKERIZED	4999
REMINGTON SYNTHETIC TOWERGUN	28"	FULL	BEAD	PARKERIZED	4919
REMINGTON SYNTHETIC	18"	IMPROVED CYLINDER	GHOST RING	PARKERIZED	4921

MODEL 870 WITH GHOST RING SIGHTS, PARKERIZED

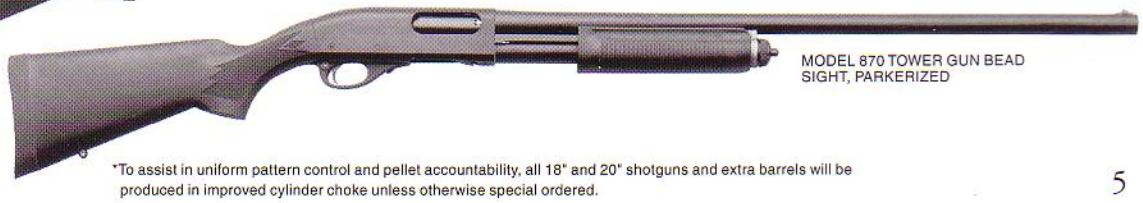

MODEL 870 TOWER GUN BEAD SIGHT, PARKERIZED

*To assist in uniform pattern control and pellet accountability, all 18" and 20" shotguns and extra barrels will be produced in improved cylinder choke unless otherwise special ordered.

MODEL 11-87P

In a tactical situation that calls for the close-in performance of a shotgun, you want maximum firepower and unquestioned reliability, shot after shot. That's why more and more departments are buying the Model 11-87 Police.

This law enforcement version of our famed Model 11-87 shotgun is all business. Remington's gas-operated autoloading action has long set the standard for functional reliability and durability. Its low recoil means excellent control in high-rate-of-fire situations with heavy buckshot or rifled slug loads. For training and familiarization this versatile shotgun also handles lighter loads without a hitch.

The receiver, barrel, magazine extension, and bracket are coated with a Parkerized metal finish that minimizes reflections and provides moisture and abrasion resistance. The bolt, carrier, and carrier release are blackened for low visibility. A factory-installed parkerized magazine extension resists corrosion and provides maximum firepower. Total capacity is seven shells.

For added durability, Model 11-87 Police shotguns come with high-strength polypropylene stocks and fore-ends. These rugged parts are impervious to moisture and will retain their strength under even the harshest operating environment. Their matte-black finish won't reflect light. To ensure the best grip and comfort, the stock has molded checkering and is finished with a 1" black, solid recoil pad. The blaze orange magazine follower permits quick, safe inspection of the chamber and magazine.

When your law enforcement officers demand the maximum in firepower and reliability, there's simply no better choice than the Model 11-87 Police.

Optional insignia and property marks for Remington law enforcement shotguns.

Letters or numerals (or combination) can be engraved on receivers, at a nominal charge. Simple property marks or insignia, up to 1¼" square, can also be engraved on receivers for orders of 25 guns or more. You furnish the design; we'll adapt it for engraving.

11-87P

MODEL 11-87P

MODEL 11-87 SHOTGUN WITH RIFLE SIGHT

MODEL 11-87 SHOTGUN WITH BEAD SIGHT

MODEL 11-87 SHOTGUN WITH GHOST RING SIGHT

STOCK	BARREL LENGTH	CHOKE	SIGHTS	FINISH	ORDER NO.
SYNTHETIC	18"	IMPROVED CYLINDER	BEAD	PARKERIZED	9855
SYNTHETIC	18"	IMPROVED CYLINDER	RIFLE	PARKERIZED	9853
SYNTHETIC	18"	IMPROVED CYLINDER	GHOST RING	PARKERIZED	9857

The Model 11-87 Police features a rugged synthetic stock and fore-end, durable parkerized metal finish, and choice of bead, rifle or ghost ring sights.

When the lives of innocent people and fellow officers depend on your marksmanship, you cannot afford anything less than the pinpoint accuracy of a Remington bolt-action centerfire rifle and our special match-grade ammunition.

The heart of Remington's law enforcement rifles is the legendary Model 700™ action. This is the same action that is at the core of the advanced M-24 Sniper Weapon System we built for the U.S. Army. It's also what makes our handbuilt Model 40-XB™ rifles so accurate and rock-solid dependable.

The 700 action is built around the unique Remington bolt design. The bolt face, barrel, and receiver surround and support the cartridge head with three overlapping rings of solid steel. The Model 700 receiver is machined from a solid block of ordnance-grade steel, then drilled and tapped for scope mounts. All our Model 700 Police rifles have a heavy, free-floating 26" barrel crowned at the muzzle for unparalleled accuracy and stability. In 223 Rem chambering, twist has been changed from 1 in 12 to 1 in 9 in order to maximize the ballistic stability of heavier bullets. Model 700s chambered for 223 Rem have five-shot capacities and hinged floor plates. Guns in 308 caliber are now equipped with a quick-change, four-shot detachable magazine.

Our line of law enforcement centerfire rifles is rounded out by the exceptional Model 40-XB rifle. Arguably the most accurate bolt action rifle available today, it's completely handcrafted and made to order in the Remington Custom Shop.

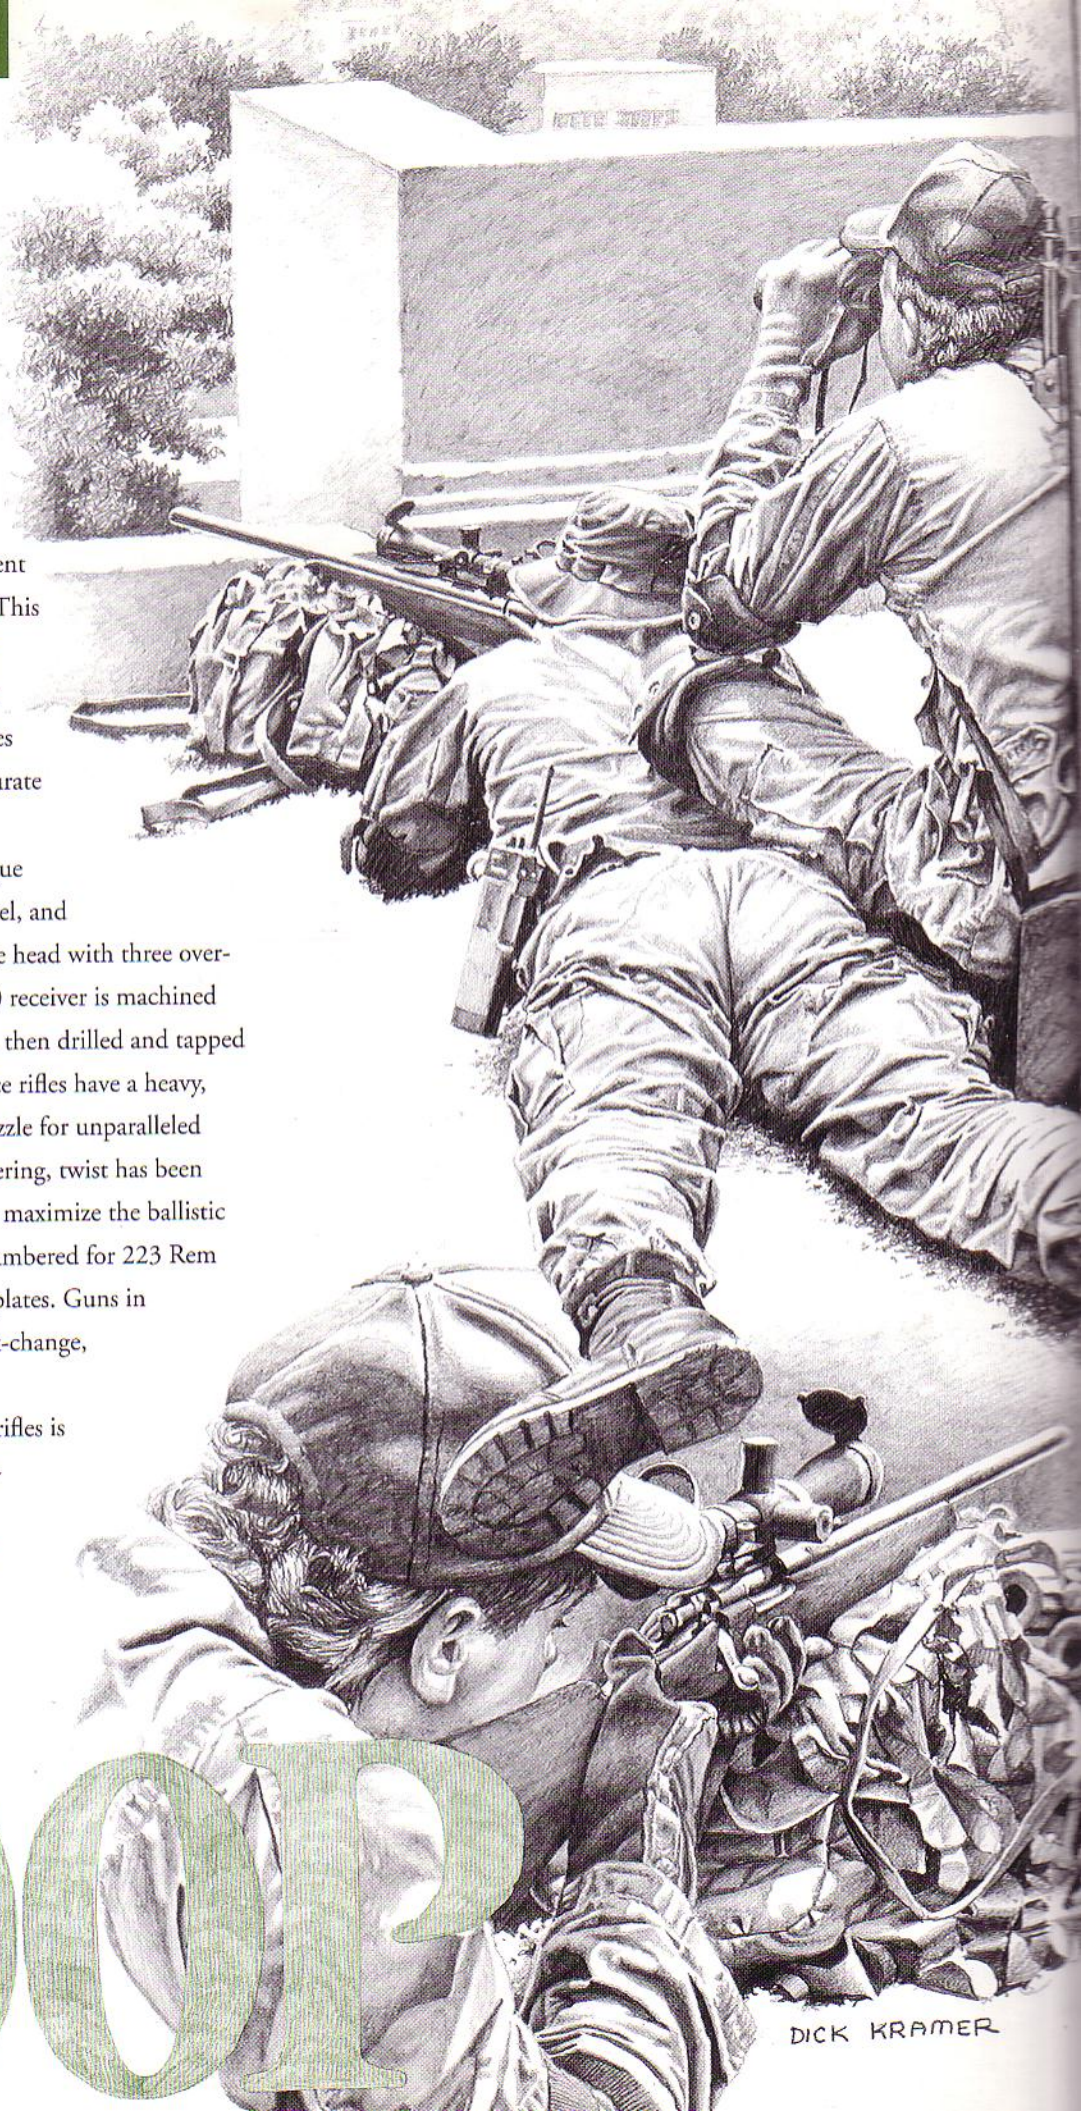

700P

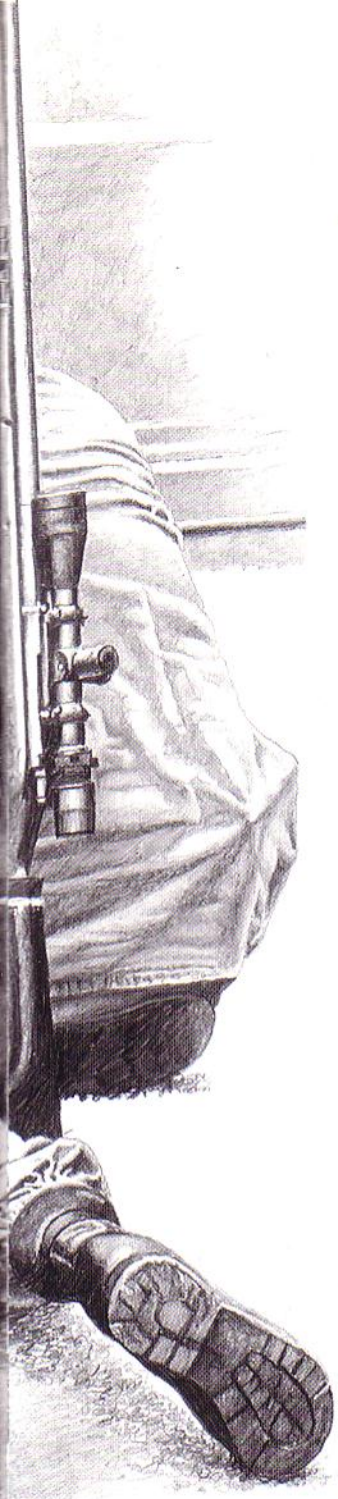

MODEL 700P RIFLES

MODEL 700 POLICE, DM 308

MODEL 700 POLICE, 223

MODEL NO.	CALIBER	ORDER NO.	WEIGHT (LBS.)	BARREL LENGTH	STANDARD TWIST
700 POLICE	223 REM.	5714	9	26"	9"
700 POLICE D.M.	308 WIN.	5715	9	26"	12"
700 TWS D.M.	308 WIN.	5712	10½*	26"	12"

*INCLUDES SCOPE, MOUNTS, AND BIPOD.

Both the standard Model 700 and the Tactical Weapon System feature composite stocks reinforced with Du Pont Kevlar® and fiberglass. They'll stay dimensionally stable in any weather and under the worst tactical situations. The stock is laid up around an aircraft-grade aluminum bedding block that runs the full length of the receiver. It has a textured, black, non-reflective finish and comes with sling swivel studs.

The TWS package includes a Leupold® Vari-X™ III (3.5 x 10) scope with a Duplex™ reticle and flip-open lens covers. A Harris bipod, a Michaels 1" Quick-Adjust™ sling with swivels, a rugged Pelican® hard case, and samples of Remington gun care products to round out the system. It's only available in 308 Win.

HARD GUN CASE INCLUDED WITH THE MODEL 700 TWS

The new 700P detachable box magazine allows greater speed and ease when loading and unloading your rifle. It also allows the carrying of a variety of rounds to adapt to any tactical situation. The detachable magazine feature is only available in the 308 caliber offering. All stainless steel box construction assures durability and weather resistance.

MODEL 40-XB

Our custom-made Model 40-XB rifle features a glass-bedded action with a free-floating stainless steel barrel. A thermoset epoxy finish on the receiver and barrel (as on the M-24 rifle) is available at an extra charge. The match-grade trigger is externally adjustable from 1½ to 3½ lbs. These incredible rifles consistently shoot sub-1" groups at 100 yards.† They have Kevlar® stocks with black satin, non-reflective finishes and a 1" black recoil pad; no hand stop or rail. The "beavertail" fore-end has a flat bottom for greater control.

MODEL 40-XB

MODEL NO.	CALIBER	ORDER NO.	WEIGHT (LBS.)	BARREL LENGTH	STANDARD TWIST	OPTIONAL TWIST
40-XB KS SINGLE SHOT	223 REM.	5991	10¼	27¼"	12"	14"
	308 WIN.	5997	10¼	27¼"	12"	10"
40-XB KS REPEATER	223 REM.	5991R	10¼	27¼"	12"	14"
	308 WIN.	5997R	10¼	27¼"	12"	10"

†Center-to-center maximum average two 5-shot groups at 100 yards. Rifles meet these accuracy standards before leaving our Custom Shop. As proof of performance, target and load data are supplied with the rifle.

Remington offers you a wide variety of specialized choices in all popular law enforcement calibers. All specifications are loaded to optimum velocity and pressure for reliable bullet performance. For departments and agencies using high velocity cartridges, Remington offers an impressive range of +P and +P+ loadings to choose from.

Our autoloading pistol cartridges bring design refinements to their maximum benefit. Each cartridge has a bullet designed for deep penetration, maximum expansion, extremely high weight retention and superb accuracy. Jacket thickness and hardness, combined with the appropriate lead-antimony content, generates the performance you demand. And flawless functioning in automatic pistols is always a critical part of our design criteria.

For departments that choose to carry revolvers, Remington offers a round that meets any performance need. From a 110 grain semi-jacketed hollow point for use in alloy-framed revolvers to the highest velocity 357 Magnum loadings, there's a Remington cartridge that delivers when called upon to do so. We also offer a wide range of solid lead and lead hollow points. So no matter what your ammunition needs, you'll find the performance and unquestioned reliability you must have in the Remington lineup.

Quality You Can Count On

Design excellence in duty ammunition means nothing unless it comes with absolute day-in, day-out performance consistency. At Remington, our efforts in product quality and consistency of performance is unrelenting. We constantly monitor our production process to be sure Remington law enforcement ammunition measures up. Frequent measurement and recording of velocity, pressure and accuracy gives us the confidence to promise: The Remington ammunition you carry on duty is designed to never let you down.

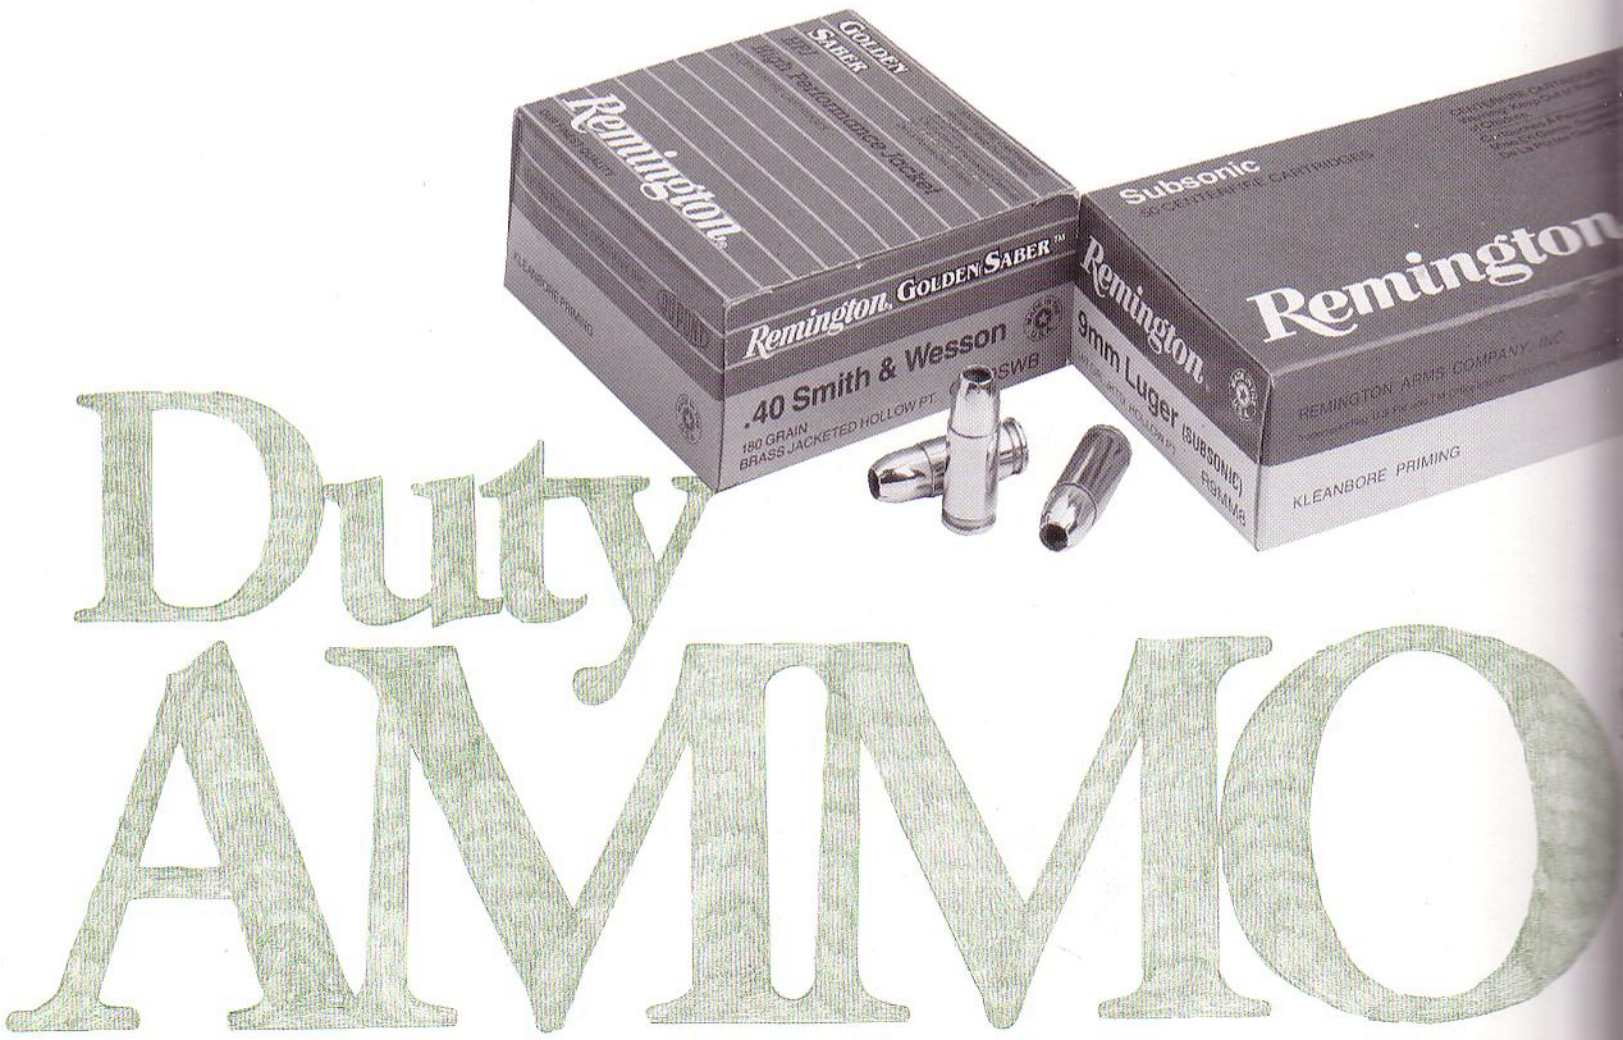

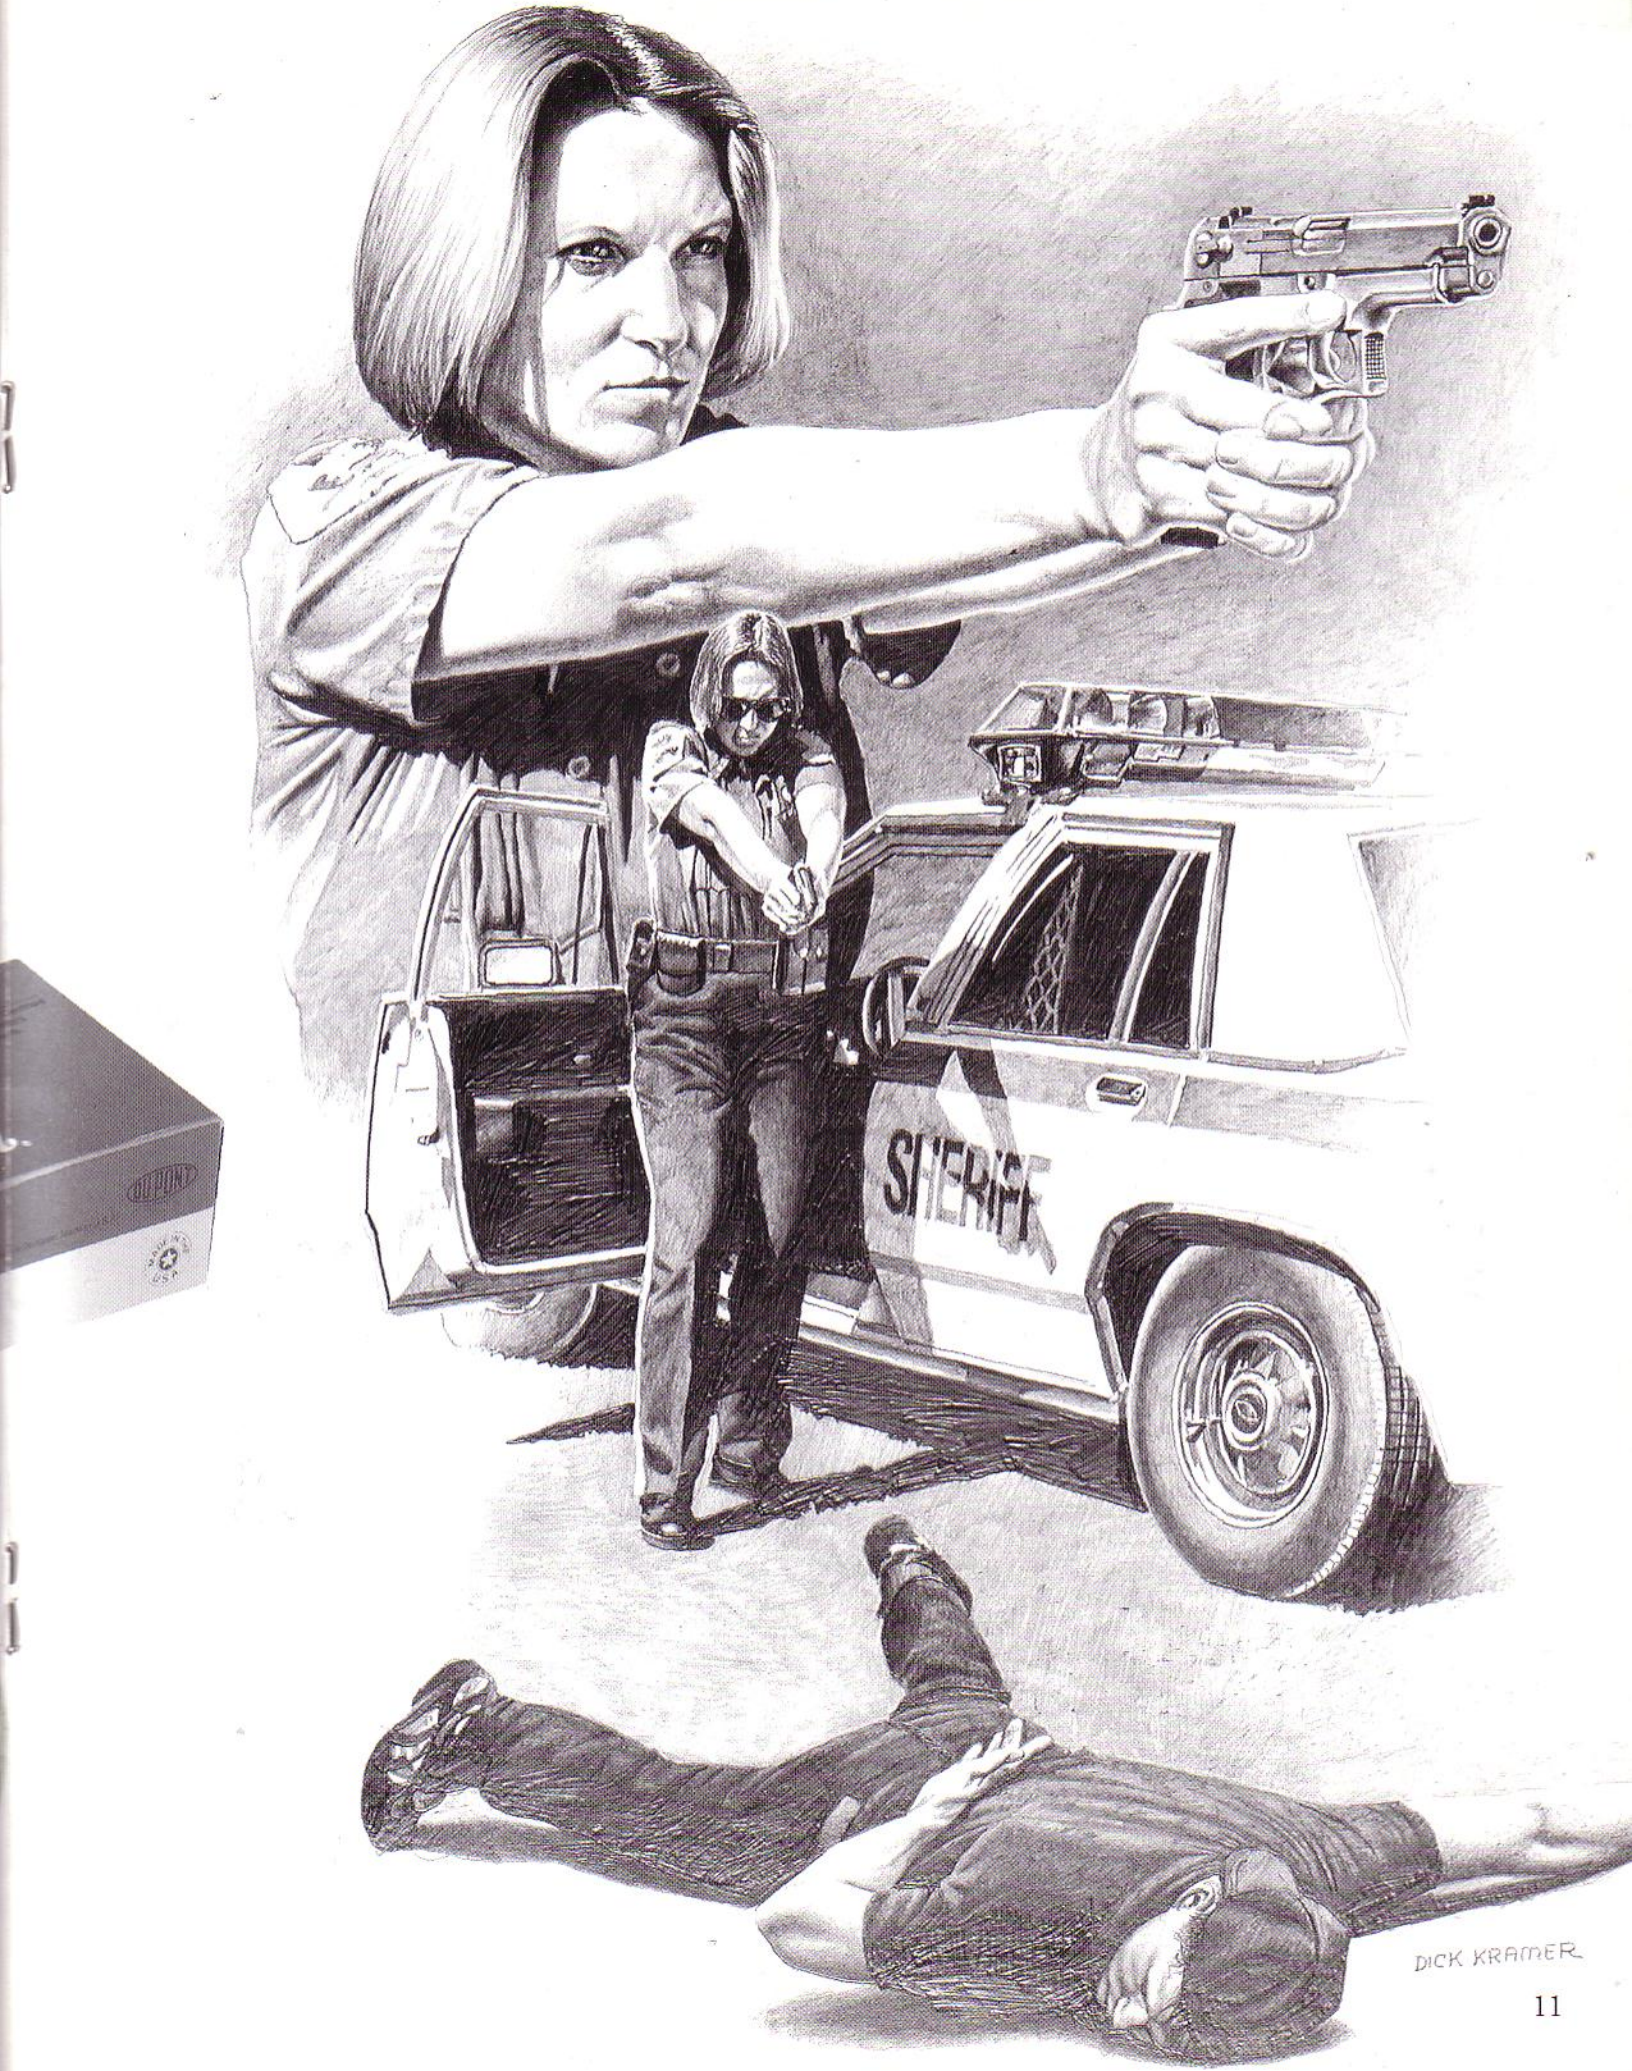
SHERIFF
DICK KRAMER

The streets have never been tougher. Your job has never been more demanding or more dangerous. That's why we're now offering law enforcement the ultimate in handgun ammunition. Golden Saber HPJ (High-Performance Jacket).

At the heart of Golden Saber HPJ is a high-performance hollow-point bullet with a jacket made entirely of cartridge brass—not copper gilding metal. Thicker and stiffer than other bullet jackets, Golden Saber HPJ releases energy over a longer distance. And, unlike conventional hollow-point bullets, the jacket is nose cut completely through, promoting controlled expansion to well over 1.5 times the bullet's original diameter. The nose cuts, configured in a new, patented spiral pattern, produce larger petals and reduce the nose cavity for enhanced mush performance.

Over a wide range of velocities, Golden Saber delivers virtual 100% weight retention. The precise hollow-point cavity design also maximizes penetration by minimizing lead core deformation. It all adds up to the kind of knockdown performance lives may depend on.

There's more. Nickel-plated cases feed slickly, eject smoothly. Powder blends are treated to suppress muzzle flash. While primers and case mouths are waterproofed for maximum integrity in all weather conditions.

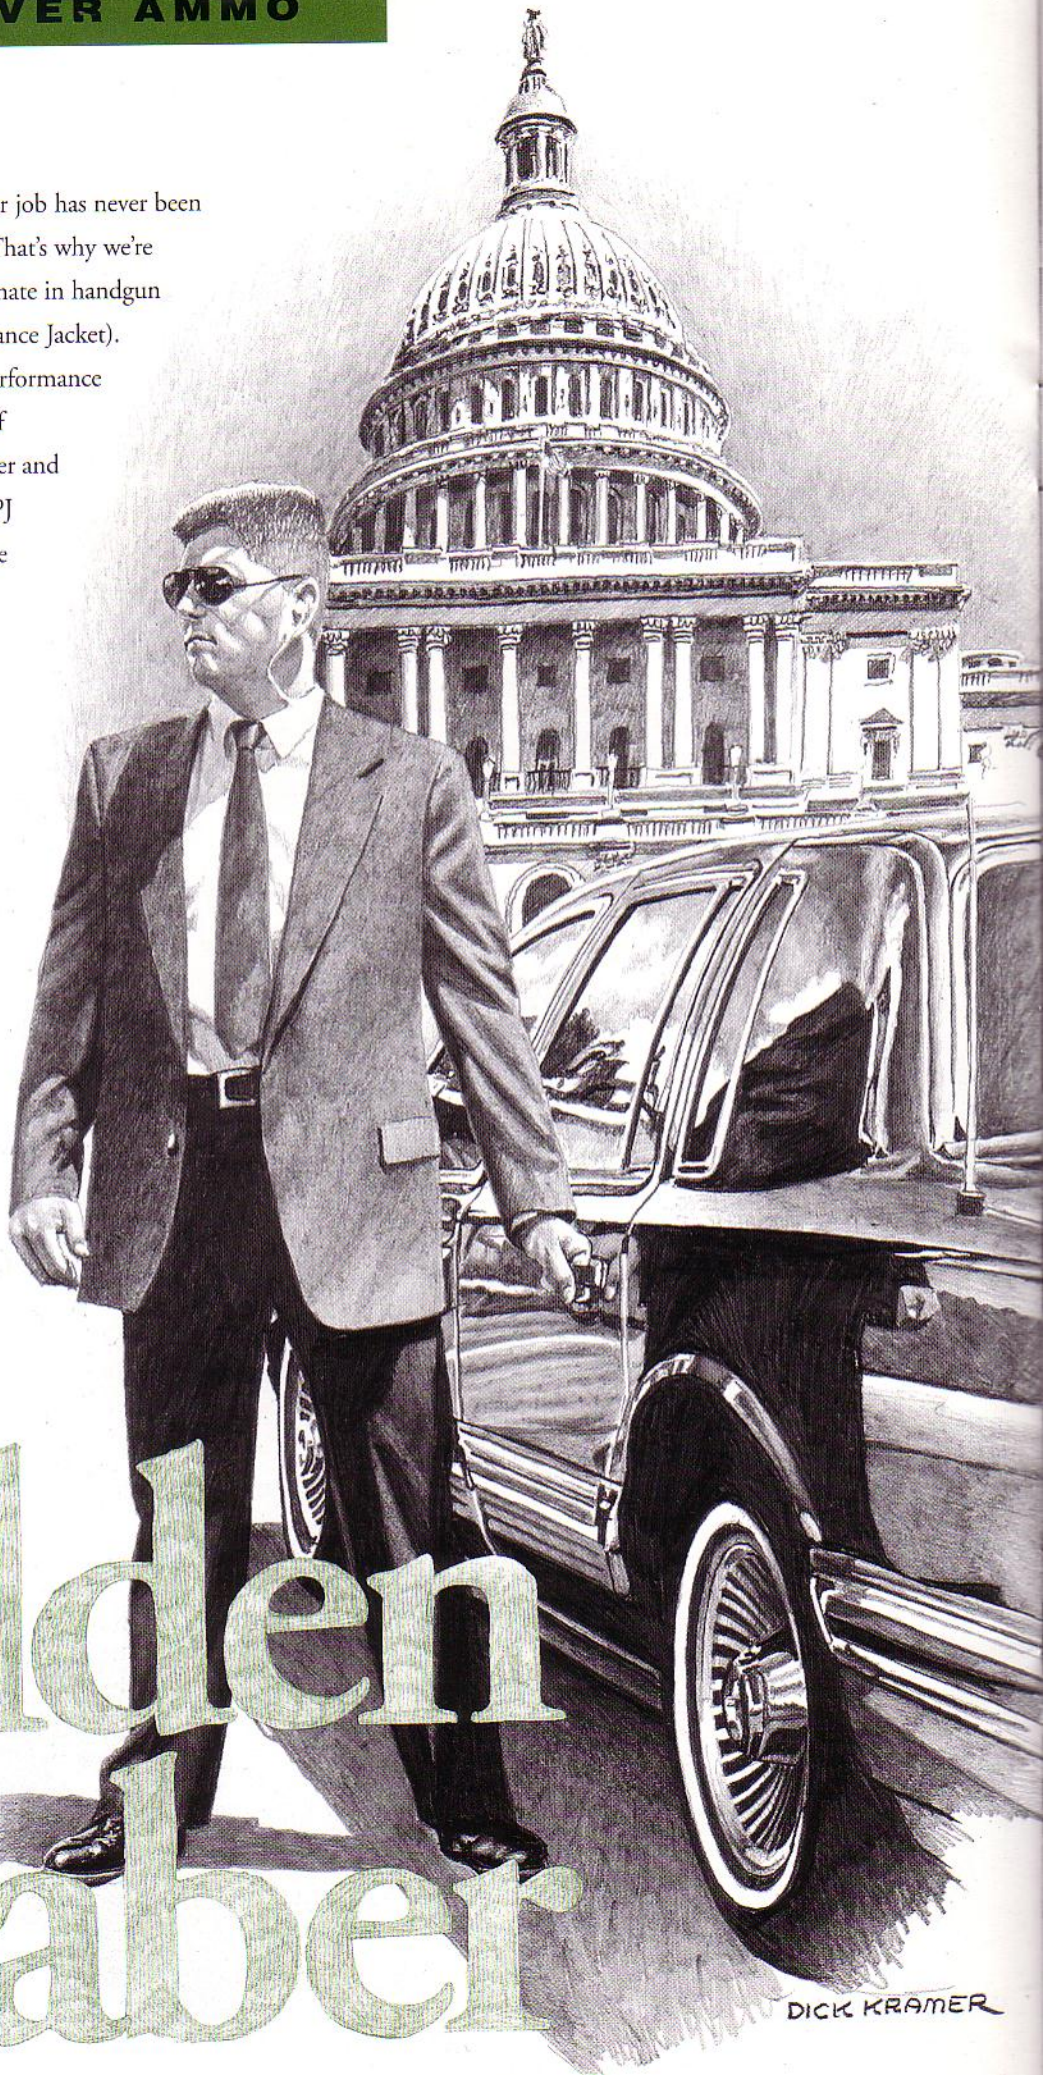

Golden Saber

In addition, all Golden Saber specifications feature our industry-exclusive Driving Band. It locks the lead core to the jacket and reduces rifling contact friction for optimum muzzle velocity. Reduced bullet nose diameter allows for precise bore alignment attributing to match-grade accuracy not usually associated with hollow-point ammunition.

Designed to meet U.S. federal law enforcement standards, Golden Saber HPJ is the technical knockout you've been waiting for. Available in 380, 9mm, 38 Special, 357 Magnum, 40 S&W, and 45 ACP, it's ready to meet your toughest real-world evaluation.

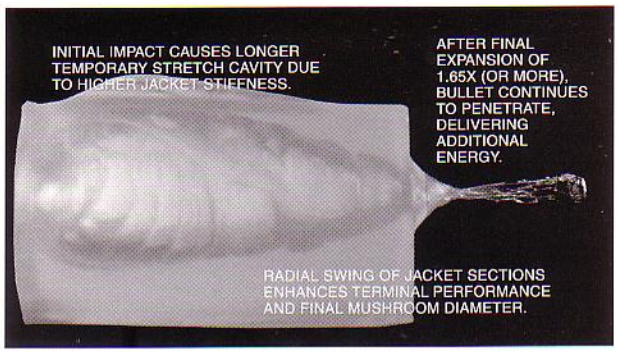

HIGH-SPEED PHOTOGRAPHY OF GOLDEN SABER HPJ BULLET PERFORMANCE IN A 9" BLOCK 10% BALLISTIC GELATIN.

THIS SERIES OF PHOTOS SHOWS THE TOTALLY CONTROLLED AND EXTREMELY UNIFORM EXPANSION OF GOLDEN SABER HPJ BULLETS.

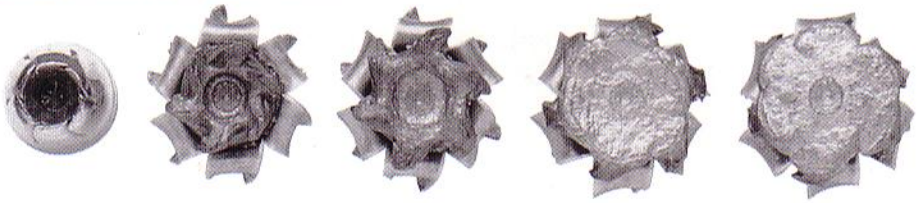

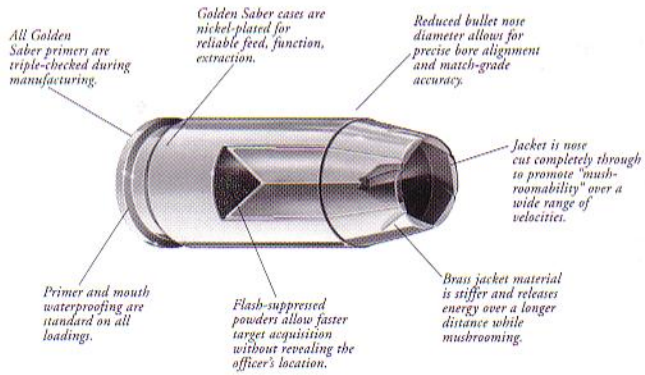

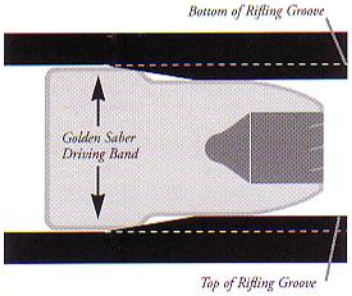

EXCLUSIVE DRIVING BAND™ PROFILE

The Golden Saber bullet has our unique Driving Band profile—a section of the bullet where its diameter is reduced from groove diameter to bore diameter. The shoulder of the Driving Band locks the jacket and core together for maximum integrity. The reduced diameter in front of the Driving Band allows the bullet to align precisely in the bore before the band engages the rifling, producing true, match-grade accuracy. This profile reduces jacket contact with the rifling, which conserves muzzle velocity often sacrificed with today's heavier weight bullets.

REMINGTON GOLDEN SABER HPJ (High-Performance Jacket)

					VELOCITY (FPS)			ENERGY (FT.-LB.)			MID-RANGE TRAJECTORY (IN.)	
CALIBER	INDEX/EDI NO.	RAMAC NO.	PRIMER NO.	WT. GRS.	MUZZLE	50 YDS.	100 YDS.	MUZZLE	50 YDS.	100 YDS.	50 YDS.	100 YDS.
357 MAGNUM	GS357MA	29400	51/2	125	1220	1095	1009	413	333	283	0.8	3.5
9MM LUGER PISTOL	GS9MMB	29420	11/2	124	1125	1031	963	349	293	255	1.0	4.0
	GS9MMC	29422	11/2	147	990	941	900	320	289	264	1.1	4.9
9MM LUGER PISTOL (+P)	GS9MMD	29424	11/2	124	1180	1089	1021	384	327	287	0.8	3.8
380 AUTO	GS380B	29410	11/2	102	940	901	866	200	184	170	1.2	5.1
38 SPECIAL (+P)	GS38SB	29432	11/2	125	975	927	885	264	238	218	1.0	5.2
40 S&W	GS40SWA	29440	51/2	165	1150	1040	964	485	396	340	1.0	4.0
	GS40SWB	29442	51/2	180	1015	960	914	412	368	334	1.3	4.5
45 AUTO	GS45APA	29444	21/2	185	1015	951	899	423	372	332	1.1	4.5
	GS45APB	29448	21/2	230	875	833	795	391	355	323	1.5	6.1
45 AUTO (+P)	GS45APC	29450	21/2	185	1140	1042	971	534	446	388	1.0	4.0

The time you spend at the range could save your life. So when you're headed out for training, bring along a cartridge that's specifically designed to help you make the most of your practice time. Bring along Leadless™ and UMC™ ammunition from Remington.

Leadless

Conventional ammunition can release lead into the air at indoor ranges. That's why more and more, shooters are turning to Leadless handgun ammunition from Remington. Available in six law enforcement calibers, this ammunition duplicates bullet weights and ballistic performance to produce points of impact identical to those of duty ammo. Our Lead-Lokt™ bullet design completely encapsulates the lead bullet in gilding metal, preventing lead vaporization during firing. And our lead-free mix primer, developed in our primer research facility, delivers the same sensitivity, ballistics and reliability as lead-based primers. Leadless. It's the cleanest, most lead-free handgun cartridge on the market.

UMC

When you fire countless training rounds every year, your ammunition has to be special:

It has to perform exactly like your duty ammo, but it has to be priced cost effectively to maximize budget spending. That's a perfect description of UMC ammunition from Remington—great performance at a great price.

UMC centerfire cartridges shoot cleanly, function reliably and deliver the same ballistic performance as your Remington duty ammo. And do it all at a suprisingly economical price. UMC ammunition is a proven performer, and it's available in 11 popular pistol and revolver calibers, and four rifle calibers.

Training AMMO

LEADLESS™ TOTALLY ENCAPSULATED AMMUNITION

CALIBER	INDEX/EDI NO.	RAMAC NO.	PRIMER NO.	WT. GRS.	BULLET STYLE	VELOCITY (FPS) MUZZLE	VELOCITY (FPS) 50 YDS.	VELOCITY (FPS) 100 YDS.	ENERGY (FT-LB) MUZZLE	ENERGY (FT-LB) 50 YDS.	ENERGY (FT-LB) 100 YDS.	MID-RANGE TRAJECTORY 50 YDS.	MID-RANGE TRAJECTORY 100 YDS.
357 MAGNUM	LL357MB	23782	51/2 L.F.*	130	TEMC, LEADLOKT	1400	1239	1116	566	443	360	0.6"	2.8"
	LL357MD	23796	51/2 L.F.	158	TEMC, LEADLOKT	1200	1081	999	505	410	350	0.9"	4.0"
9MM LUGER	LL9MMA	23784	11/2 L.F.	115	TEMC, LEADLOKT	1135	1041	973	329	277	242	0.9"	4.0"
	LL9MMB	23794	11/2 L.F.	124	TEMC, LEADLOKT	1110	1030	971	339	292	259	1.0"	4.1"
	LL9MMC	23786	11/2 L.F.	147	TEMC, LEADLOKT	990	941	900	320	289	264	1.1"	4.9"
380 AUTO	LL380B	23806	11/2 L.F.	95	TEMC, LEADLOKT	955	865	785	190	160	130	1.4"	5.9"
38 SPECIAL	LL38SB	23788	11/2 L.F.	130	TEMC, LEADLOKT	950	901	859	261	235	213	1.4"	5.0"
	LL385SD	23800	11/2 L.F.	158	TEMC, LEADLOKT	755	723	692	200	183	168	2.0"	8.3"
40 S&W	LL40SWB	23790	51/2 L.F.	180	TEMC, LEADLOKT	985	936	893	388	350	319	1.4"	5.0"
45 AUTO	LL45APB	23792	21/2 L.F.	230	TEMC, LEADLOKT	835	800	767	356	326	300	1.6"	6.8"

* L.F. = LEAD FREE

UMC CENTERFIRE PISTOL & REVOLVER CARTRIDGES (Packed 500 Rounds Per Case)

CALIBER	INDEX/EDI NUMBER	RAMAC NO.	PRIMER NO.	WT. GRS.	BULLET STYLE	VELOCITY (FPS) MUZZLE	VELOCITY (FPS) 50 YDS.	VELOCITY (FPS) 100 YDS.	ENERGY (FT-LB) MUZZLE	ENERGY (FT-LB) 50 YDS.	ENERGY (FT-LB) 100 YDS.	MID RANGE TRAJECTORY 50 YDS.	MID RANGE TRAJECTORY 100 YDS.
25 AUTO PISTOL (6.35mm)	L25AP	23716	11/2	50	METAL CASE	760	707	659	64	56	48	2.0"	8.7"
32 AUTO (7.65mm)	L32AP	23704	11/2	71	METAL CASE	905	855	811	129	115	104	1.7"	6.1"
357 MAGNUM	L357M6	23736	51/2	158	LEAD SW	1235	1104	1015	535	428	361	0.8"	3.5"
357 MAGNUM	L357M12	23738	51/2	125	JSP	1450	1240	1090	583	427	330	0.6"	2.8"
9MM LUGER	L9MM3	23728	11/2	115	METAL CASE	1135	1041	973	329	277	242	0.9"	4.0"
380 AUTO	L380AP	23720	11/2	95	METAL CASE	955	865	785	190	160	130	1.4"	5.9"
38 SUPER ACP	L38SUP	23722	11/2	130	METAL CASE	1215	1099	1017	426	348	298	0.8"	3.6"
38 SPECIAL	L38S5	23724	11/2	158	LEAD RND NOSE	755	723	692	200	183	168	0.2"	8.3"
38 SPECIAL	L38S11	23730	11/2	130	METAL CASE	950	913	879	261	240	223	1.2"	4.8"
10 MM AUTO	L10MM6	23706	21/2	180	METAL CASE	1150	1063	998	529	452	398	0.9"	3.7"
40 S&W	L40SW3	23742	51/2	180	METAL CASE	985	936	893	388	350	319	1.4"	5.0"
44 REM. MAG.	L44MG4	23740	21/2	240	LEAD RND NOSE	1000	947	902	533	477	433	1.1"	4.8"
44 REM. MAG.	L44MG7	23744	21/2	180	JSP	1610	1365	1175	1036	745	551	0.5"	2.3"
45 AUTO	L45AP4	23726	21/2	230	METAL CASE	835	800	767	356	326	300	1.6"	6.8"

REMINGTON® PISTOL AND REVOLVER AMMUNITION BALLISTICS

CALIBER	INDEX/EDI NO.	PRIMER NO.	WT. GRS.	BULLET STYLE	VELOCITY (FPS)			ENERGY (FT-LB)			MID-RANGE TRAJECTORY	
					MUZZLE	50 YDS.	100 YDS.	MUZZLE	50 YDS.	100 YDS.	50 YDS.	100 YDS.
25 (6.35MM) AUTO. PISTOL	R25AP	1½	*50	METAL CASE	760	707	659	64	56	48	2.0"	8.7"
32 S. & W.	R32SW	5½	*88	LEAD	680	645	610	90	81	73	2.5"	10.5"
32 S. & W. LONG	R32SWL	1½	*98	LEAD	705	670	635	115	98	88	2.3"	10.5"
32 (7.65MM) AUTO. PISTOL	R32AP	1½	*71	METAL CASE	905	855	810	129	115	97	1.4"	5.8"
357 MAG.	R357M7	5½	110	SEMI-JACKETED H.P.	1295	1094	975	410	292	232	0.8"	3.5"
	R357M1	5½	125	SEMI-JACKETED H.P.	1450	1240	1090	583	427	330	0.6"	2.8"
	R357M11	5½	*125	SEMI-JACKETED H.P. (MED. VEL.)	1220	1077	984	413	322	269	0.8"	3.7"
	R357M9	5½	140	SEMI-JACKETED H.P.	1360	1195	1076	575	444	360	0.7"	3.0"
	R357M2	5½	158	SEMI-JACKETED H.P.	1235	1104	1015	535	428	361	0.8"	3.5"
	R357M3	5½	158	SOFT POINT	1235	1104	1015	535	428	361	0.8"	3.5"
	R357M5	5½	158	SEMI-WADCUTTER	1235	1104	1015	535	428	361	0.8"	3.5"
	R357M10	5½	180	SEMI-JACKETED H.P.	1145	1053	985	524	443	388	0.9"	3.9"
	GS357MA	5½	125	BRASS-JACKETED HOLLOW POINT	1220	1095	1009	413	333	283	0.8"	3.5"
9MM LUGER AUTO. PISTOL	R9MM5	1½	88	JACKETED H.P.	1500	1191	1012	440	277	200	0.6"	3.1"
	R9MM1	1½	115	JACKETED H.P.	1155	1047	971	341	280	241	0.9"	3.9"
	R9MM3	1½	*115	METAL CASE	1135	1041	973	329	277	242	0.9"	4.0"
	R9MM4	1½	115	JACKETED H.P. (+P+)	1310	1154	1046	438	340	279	0.7"	3.3"
	R9MM6	1½	115	†JACKETED H.P. (+P)	1250	1113	1019	399	316	265	0.8"	3.5"
	R9MM2	1½	124	METAL CASE	1110	1030	971	339	292	259	1.0"	4.1"
	R9MM10	1½	124	JACKETED H.P.	1120	1028	960	346	291	254	1.0"	4.1"
	R9MM7	1½	140	SEMI-JACKETED H.P. (PRACTICE)	935	889	849	272	246	224	1.3"	5.5"
	R9MM8	1½	147	JACKETED H.P. (SUBSONIC)	990	941	900	320	289	264	1.1"	4.9"
	R9MM9	1½	147	METAL CASE	990	920	868	320	289	264	1.2"	5.1"
	GS9MMB	1½	124	BRASS-JACKETED HOLLOW POINT	1125	1031	963	349	293	255	1.0"	4.0"
	GS9MMD	1½	124	BRASS-JACKETED HOLLOW POINT(+P)	1180	1089	1021	384	327	287	0.8	3.8
	GS9MMC	1½	147	BRASS-JACKETED HOLLOW POINT	990	941	900	320	289	264	1.1"	4.9"
380 AUTO. PISTOL	R380A1	1½	88	JACKETED H.P.	990	920	868	191	165	146	1.2"	5.1"
	R380AP	1½	*95	METAL CASE	955	865	785	190	160	130	1.4"	5.9"
	GS380B	1½	102	BRASS-JACKETED HOLLOW POINT	940	901	866	200	184	170	1.2	5.1
38 SUPER AUTO. COLT PISTOL	R38SU1	1½	*115	†JACKETED H.P. (+P)	1300	1147	1041	431	336	277	0.7"	3.3"
38 S. & W.	R38SW	1½	*146	LEAD	685	650	620	150	135	125	2.4"	10.0"
38 SPECIAL	R38S1	1½	95	†SEMI-JACKETED H.P. (+P)	1175	1044	959	291	230	194	0.9"	3.9"
	R38S10	1½	110	†SEMI-JACKETED H.P. (+P)	995	926	871	242	210	185	1.2"	5.1"
	R38S16	1½	110	SEMI-JACKETED H.P.	950	890	840	220	194	172	1.4"	5.4"
	R38S15	1½	110	SEMI-JACKETED H.P. (+P+)	1024	948	888	256	219	193	1.1"	4.8"
	R38S2	1½	*125	†SEMI-JACKETED H.P. (+P)	945	898	858	248	224	204	1.3"	5.4"
	R38S3	1½	148	TARGETMASTER® LEAD W.C. MATCH	710	634	566	166	132	105	2.4"	10.8"
	R38S4	1½	158	TARGETMASTER LEAD	755	723	692	200	183	168	2.0"	8.3"
	R38S5	1½	158	LEAD (ROUND NOSE)	755	723	692	200	183	168	2.0"	8.3"
	R38S14	1½	158	†SEMI-WADCUTTER (+P)	890	855	823	278	257	238	1.4"	6.0"
	R38S6	1½	158	SEMI-WADCUTTER	755	723	692	200	183	168	2.0"	8.3"
	R38S12	1½	158	†LEAD H.P. (+P)	890	855	823	278	257	238	1.4"	6.0"
	GS38SB	1½	125	BRASS-JACKETED H.P. (+P)	975	927	885	264	238	218	1.0"	5.2"
38 SHORT COLT	R38SC	1½	*125	LEAD	730	685	645	150	130	115	2.2"	9.4"
40 S. & W.	R40SW1	5½	*155	JACKETED H.P.	1205	1095	1017	499	413	356	0.8"	3.6"
	R40SW2	5½	180	JACKETED H.P.	985	936	893	388	350	319	1.4"	5.0"
	GS40SWA	5½	165	BRASS-JACKETED HOLLOW POINT	1150	1040	964	485	396	340	1.0"	4.0"
	GS40SWB	5½	*180	BRASS-JACKETED HOLLOW POINT	1015	960	914	412	368	334	1.3"	4.5"
10MM AUTO.	R10MM3	2½	180	JACKETED H.P. (SUBSONIC)	1055	997	951	445	397	361	1.0"	4.6"
	R10MM4	2½	*180	JACKETED H.P. (HIGH VEL.)	1160	1079	1017	538	465	413	0.9"	3.8"
	R10MM2	2½	200	METAL CASE	1050	994	948	490	439	399	1.0"	4.2"
41 REM. MAG.	R41MG3	2½	*170	SEMI-JACKETED H.P.	1420	1166	1014	761	513	388	0.7"	3.2"
	R41MG1	2½	210	SOFT POINT	1300	1162	1062	788	630	526	0.7"	3.2"
	R41MG2	2½	210	LEAD	965	898	842	434	376	331	1.3"	5.4"
44 REM. MAG.	R44MG5	2½	180	SEMI-JACKETED H.P.	1610	1365	1175	1036	745	551	0.5"	2.3"
	R44MG6	2½	210	SEMI-JACKETED H.P.	1495	1312	1167	1042	803	634	0.6"	2.5"
	R44MG1	2½	240	LEAD GAS CHECK	1350	1186	1069	971	749	608	0.7"	3.1"
	R44MG2	2½	*240	SOFT POINT	1180	1081	1010	741	623	543	0.9"	3.7"
	R44MG3	2½	240	SEMI-JACKETED H.P.	1180	1081	1010	741	623	543	0.9"	3.7"
	R44MG4	2½	240	LEAD (MED. VEL.)	1000	947	902	533	477	433	1.1"	4.8"
44 S. & W. SPECIAL	R44SW1	2½	*200	SEMI-WADCUTTER	1035	938	866	476	391	333	1.1"	4.9"
	R44SW	2½	246	LEAD	755	725	695	310	285	265	2.0"	8.3"
45 COLT	R45C1	2½	*225	SEMI-WADCUTTER (KEITH)	960	890	832	460	395	346	1.3"	5.5"
	R45C	2½	250	LEAD	860	820	780	410	375	340	1.6"	6.6"
45 AUTO.	R45AP1	2½	185	TARGETMASTER LEAD W.C. MATCH	770	707	650	244	205	174	2.0"	8.7"
	R45AP2	2½	*185	JACKETED H.P.	1000	939	889	411	362	324	1.1"	4.9"
	R45AP6	2½	185	†JACKETED H.P. (+P)	1140	1040	971	534	445	387	0.9"	4.0"
	R45AP4	2½	230	METAL CASE	835	800	767	356	326	300	1.6"	6.8"
	GS45APA	2½	185	BRASS-JACKETED HOLLOW POINT	1015	951	899	423	372	332	1.1"	4.5"
	GS45APC	2½	185	BRASS-JACKETED HOLLOW POINT (+P)	1140	1042	971	534	446	388	1.0"	4.0"
	GS45APB	2½	230	BRASS-JACKETED HOLLOW POINT	875	833	795	391	355	323	1.5"	6.1"

*Illustrated (not shown in actual size) **Will not chamber in 357 Mag. or 38 Special handguns. †Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.
§Subject to stock on hand. (A) Adapted only for 38 Colt sporting, military and pocket model automatic pistols. These pistols were discontinued after 1928. (B) Adapted only for 38 Colt Super and Colt Commander automatic pistols. Not for use in sporting, military and pocket models.

25 (6.35MM) AUTO. PISTOL

32 S. & W.

32 S. & W. LONG

32 (7.65MM) AUTO, PISTOL

357 MAG.

9MM LUGER AUTO. PISTOL

380 AUTO. PISTOL

38 SUPER AUTO. COLT PISTOL (B)

38 S.& W.

38 SPECIAL

38 SHORT COLT

40 S. & W.

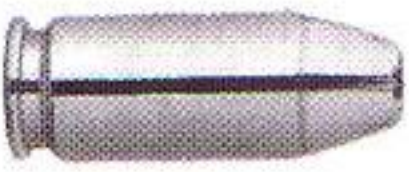

40 S. & W. (GS)

10MM AUTO.

41 REM. MAG.

44 REM. MAG.

44 S. & W. SPECIAL

45 COLT

45 AUTO.

BRASS JACKETED HOLLOW POINT
Standard on all our Golden Saber HPJ (High-Performance Jacket) ammunition, this ultra-premium bullet is designed for optimum expansion, penetration, and accuracy.

SEMI-JACKETED HOLLOW POINT
Our performance bullet for revolvers provides uniform expansion and reliable penetration.

WADCUTTER
Solid lead for precision target shooting.

SEMI-WADCUTTER
Lead bullet ballistics with moderate expansion, and wadcutter paper target performance.

JACKETED HOLLOW POINT
Provides optimum penetration and expansion, and feed reliability in all auto loading pistols.

SOFT POINT
Designed for deeper penetration than SJHP.

LEAD HOLLOW POINT
Greater expansion than lead semi-wadcutter.

LEAD ROUND NOSE
Our general purpose revolver bullet.

METAL CASE
Ensures positive functioning in autoloaders.

LEADLESS
Totally encapsulated metal case with a lead-free primer mix.

TRUNCATED ROUND NOSE METAL CASE (MATCH)
Features a unique metal case bullet profile for enhanced accuracy and positive feeding. Ideal for duty, training, and competition.

Remington continues to offer all agencies a full lineup of precision-loaded centerfire cartridges. Every cartridge combines the highest-quality brass and bullets with specially-blended powders and our Kleanbore® primers for clean, non-fouling performance.

Law Enforcement

When lives depend on your first shot, trust Remington centerfire ammunition. Each cartridge is specifically designed to deliver the uncompromising accuracy your job demands.

The following special match-grade cartridges are available in popular law enforcement calibers:

- **R223R4 223 Rem. HP. Match.** The 60-gr. Sierra® bullet produces superb match-grade accuracy and is fully functional in all automatic weapons, regardless of barrel twist rate.
- **R308W7 308 Win. BTHP Match.** Loaded with the Sierra Match King® 168-gr. boat tail hollow point for exceptional long-range accuracy. This product is loaded to deliver sub-M.O.A. accuracy.

Wildlife Management

When dispatching game animals is a part of your duty requirements, you need high-performance centerfire ammunition tailored for specific situations: Safari Grade and Extended Range cartridges.

If you anticipate closer shots, our Safari Grade cartridge is just what you need. For sheer knockdown power nothing else even comes close. Its Swift A-Frame™ bullet design features two distinct cores: the front produces a massive mushroom, while the rear core ensures maximum penetration.

When extreme accuracy is required, depend on Extended Range cartridges to get the job done. Available in both a boat-tail and flat-base design, each round redefines the term "flat-shooting." So if you're looking for the perfect combination of accuracy and on-game performance, look no further than Extended Range.

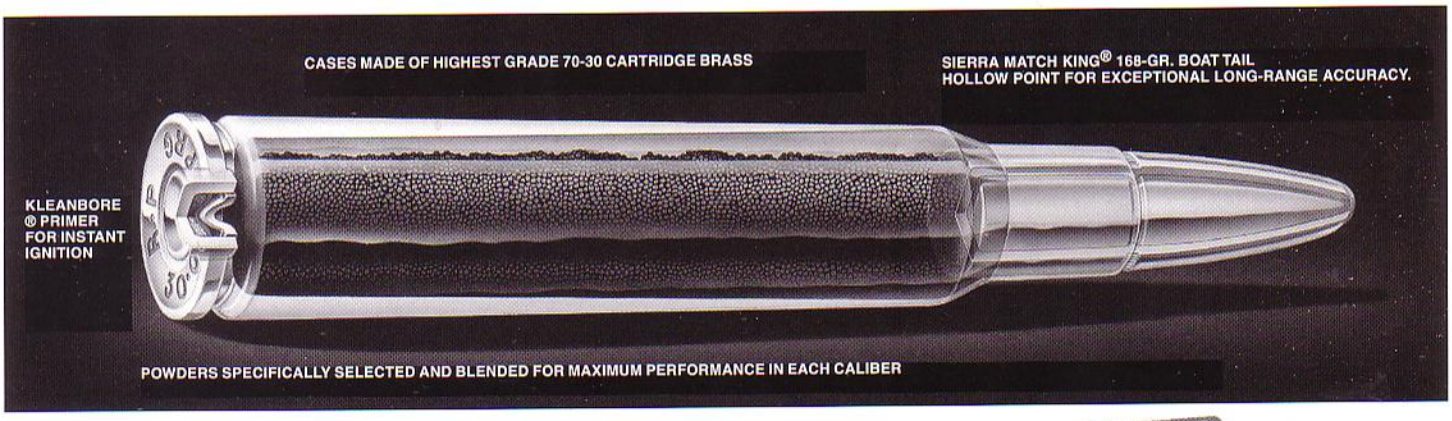

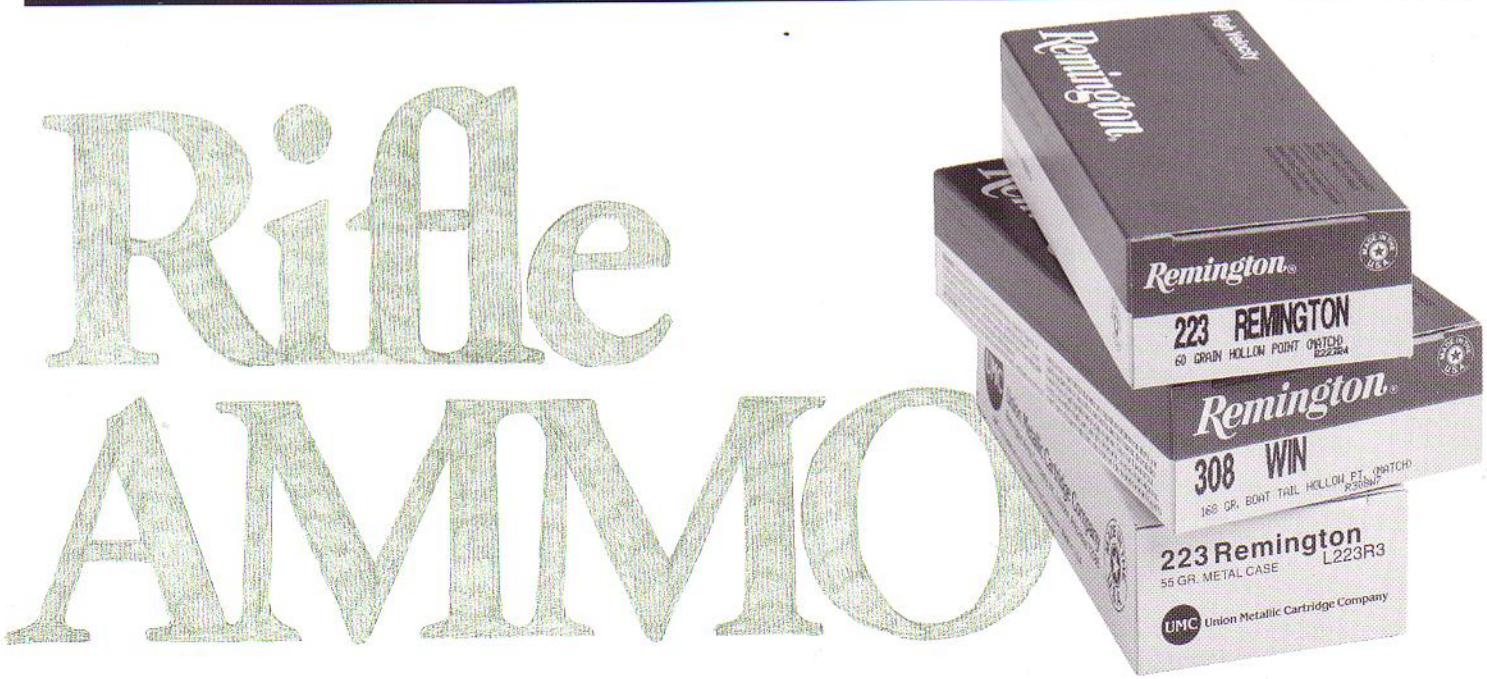

REMINGTON CENTERFIRE RIFLE CARTRIDGE BALLISTICS
(Packed 200 Rounds Per Case)

CALIBERS	INDEX/ EDI NUMBER	WT.- GRS.	BULLET STYLE	PRIMER NO.	VELOCITY FEET PER SECOND MUZZLE	100 YDS.	200 YDS.	ENERGY FOOT-POUNDS MUZZLE	100 YDS.	200 YDS.	TRAJECTORY† 0.0 INDICATES YARDAGE AT WHICH RIFLE WAS SIGHTED IN. SHORT RANGE — BULLET DOES NOT RISE MORE THAN 1" ABOVE LINE OF SIGHT FROM MUZZLE TO SIGHTING IN RANGE. 50 YDS.	100 YDS.	150 YDS.	200 YDS.	250 YDS.	300 YDS.
223 REMINGTON	R223R1	55	POINTED SOFT POINT	71/2	3240	2747	2304	1282	921	648	0.4	0.8	0.0	−2.2	−6.0	−11.8
	R223R2	55	HOLLOW POINT POWER-LOKT®	71/2	3240	2773	2352	1282	939	675	0.4	0.8	0.0	−2.1	−5.8	−11.4
	R223R3	55	METAL CASE	71/2	3240	2759	2326	1282	929	660	0.4	0.8	0.0	−2.1	−5.9	−11.6
	R223R4	60	HOLLOW POINT MATCH	71/2	3100	2712	2355	1280	979	739	0.5	0.8	0.0	−2.2	−6.0	−11.5
30-30 WIN.	R30301	150	SOFT POINT CORE-LOKT®	91/2	2390	1973	1605	1902	1296	858	0.5	0.0	−2.7	−8.2	−17.0	−30.0
	R30302	170	SOFT POINT CORE-LOKT®	91/2	2200	1895	1619	1827	1355	989	0.6	0.0	−3.0	−8.9	−18.0	−31.1
	R30303	170	HOLLOW POINT CORE-LOKT®	91/2	2200	1895	1619	1827	1355	989	0.6	0.0	−3.0	−8.9	−18.0	−31.1
	ER303OA	160	EXTENDED RANGE	91/2	2300	1997	1719	1879	1416	1050	0.5	0.0	−2.7	−7.9	-16.1	-27.6
30 CARBINE	R30CAR	110	SOFT POINT	61/2	1990	1567	1236	967	600	373	0.9	0.0	−4.5	−13.5	−28.3	−49.9
308 WIN.	R308W1	150	POINTED SOFT POINT CORE-LOKT®	91/2	2820	2533	2263	2648	2137	1705	0.2	0.0	−1.5	−4.5	−9.3	−15.9
	R308W2	180	SOFT POINT CORE-LOKT®	91/2	2620	2274	1955	2743	2066	1527	0.3	0.0	−2.0	−5.9	−12.1	−20.9
	R308W3	180	POINTED SOFT POINT CORE-LOKT®	91/2	2620	2393	2178	2743	2288	1896	0.2	0.0	−1.8	−5.2	−10.4	−17.7
	R308W7	168	BOAT TAIL HOLLOW POINT MATCH	91/2	2680	2493	2314	2678	2318	1998	0.2	0.0	−1.6	−4.7	−9.4	−15.9
	ER308WA	165	EXTENDED RANGE BOAT TAIL	91/2	2700	2497	2303	2670	2284	1942	0.2	0.0	−1.6	−4.7	−9.4	−16.0
	ER308WB	178	EXTENDED RANGE	91/2	2620	2415	2220	2713	2306	1948	0.2	0.0	−1.7	−5.1	−10.2	−17.2
30-06 SPRINGFIELD	R30061	125	POINTED SOFT POINT	91/2	3140	2780	2447	2736	2145	1662	0.4	0.8	0.0	−2.1	−5.6	−10.7
	R30062	150	POINTED SOFT POINT CORE-LOKT®	91/2	2910	2617	2342	2820	2281	1827	0.6	0.9	0.0	−2.3	−6.3	−12.0
	R30063	150	BRONZE POINT	91/2	2910	2656	2416	2820	2349	1944	0.6	0.9	0.0	−2.2	−6.0	−11.4
	R3006B	165	POINTED SOFT POINT CORE-LOKT®	91/2	2800	2534	2283	2872	2352	1909	0.7	1.0	0.0	−2.5	−6.7	−12.7
	R30064	180	SOFT POINT CORE-LOKT®	91/2	2700	2348	2023	2913	2203	1635	0.2	0.0	−1.8	−5.5	−11.2	−19.5
	R30065	180	POINTED SOFT POINT CORE-LOKT®	91/2	2700	2469	2250	2913	2436	2023	0.2	0.0	−1.6	−4.8	−9.7	−16.5
	R30066	180	BRONZE POINT	91/2	2700	2485	2280	2913	2468	2077	0.2	0.0	−1.6	−4.7	−9.6	−16.2
	R30067	220	SOFT POINT CORE-LOKT®	91/2	2410	2130	1870	2837	2216	1708	0.4	0.0	−2.3	−6.8	−13.8	−23.6
	ER3006A	152	EXTENDED RANGE	91/2	2910	2654	2413	2858	2378	1965	0.6	0,9	0.0	−2.3	−6.0	−11.4
	ER3006B	165	EXTENDED RANGE BOAT TAIL	91/2	2800	2592	2394	2872	2462	2100	0.6	1.0	0.0	−2.4	−6.2	−11.8
	ER3006C	178	EXTENDED RANGE	91/2	2720	2511	2311	2924	2491	2111	0.7	1.0	0.0	−2.6	−6.7	−12.7
	RS3006A	180	SWIFT A-FRAME PSP	91/2	2700	2465	2243	2913	2429	2010	0.2	0.0	−1.6	−4.8	−9.8	−16.6
300 WIN. MAG.	R300W2	180	POINTED SOFT POINT CORE-LOKT®	91/2M	2960	2745	2540	3501	3011	2578	0.5	0.8	0.0	−2.1	−5.5	−10.4
	ER300WB	190	EXTENDED RANGE BOAT TAIL	91/2M	2885	2691	2506	3511	3055	2648	0.5	0.9	0.0	−2.2	−5.7	−10.7
	RS300WA	200	SWIFT A-FRAME™ PSP	91/2M	2825	2595	2376	3544	2989	2506	0.6	1.0	0.0	−2.4	−6.3	−11.9
7MM REM. MAG.	R7MM2	150	POINTED SOFT POINT CORE-LOKT®	91/2M	3110	2830	2568	3221	2667	2196	0.4	0.8	0.0	−1.9	−5.2	−9.9
	R7MM3	175	POINTED SOFT POINT CORE-LOKT®	91/2M	2860	2645	2440	3178	2718	2313	0.6	0.9	0.0	−2.3	−6.0	−11.3
	R7MM4	140	POINTED SOFT POINT	91/2M	3175	2923	2684	3133	2655	2240	0.4	0.7	0.0	−1.8	−4.8	−9.1
	ER7MMA	165	EXTENDED RANGE	91/2M	2900	2699	2507	3081	2669	2303	0.5	0.9	0.0	−2.1	−5.7	−10.7
	RS7MMA	160	SWIFT A-FRAME™ PSP	91/2M	2900	2659	2430	2987	2511	2097	0.6	0.9	0.0	−2.2	−5.9	−11.3

UMC CENTERFIRE RIFLE CARTRIDGES
(Packed 500 Rounds Per Case)

CALIBER	ORDER NO.	PRIMER NO.	WT. GRS.	BULLET STYLE	VELOCITY (FPS) MUZZLE	100 YDS.	200 YDS.	ENERGY(FT.-LBS.) MUZZLE	100 YDS.	200 YDS.	SHORT RANGE TRAJECTORY 50	100	150	200	250	300
223 REM	L223R3	71/2	55	MC	3240	2759	2326	1282	929	660	0.4	0.8	0.0	-2.1	-5.9	-11.6
7.62 X39 MM	L762391	71/2	123	MC	2365	2060	1780	1527	1159	865	0.4	0.0	-2.5	-7.3	-15.0	-25.7
30 CARBINE	L30CR1	61/2	110	MC	1990	1567	1236	1412	600	373	0.9	0.0	-4.5	-13.5	-28.3	-49.9
308 WIN.	L308W4	91/2	150	MC	2820	2533	2263	2648	2137	1705	0.2	0.0	-1.5	-4.5	-9.3	-15.9

REMINGTON RIMFIRE AMMO

PRODUCT	INDEX/ EDI NUMBER	WT. GRS.	BULLET STYLE	VELOCITY (FT./SEC.) MUZZLE	100 YDS.	ENERGY (FT. LBS.) MUZZLE	100 YDS.
CBEE 22 CARTRIDGES, LOW VEL. (LONG)	CB-22L	30	LEAD	700	†640	34	†27
CBEE 22 CARTRIDGES, LOW VEL. (SHORT)	CB-22S	30	LEAD	700	†640	34	†27
TARGET 22 CARTRIDGES, STANDARD VEL. (LONG RIFLE)	6122	40	LEAD	1150	976	117	85
TARGET 22 CARTRIDGES, STANDARD VEL. (LONG RIFLE)	*6100	40	LEAD	1150	976	117	85
GOLDEN™ BULLET CARTRIDGES, HIGH VEL. (LONG RIFLE)	1522	40	LEAD	1255	1017	140	92
GOLDEN BULLET CARTRIDGES, HIGH VEL. (LONG RIFLE)	*1500	40	LEAD	1255	1017	140	92
GOLDEN BULLET CARTRIDGES, HIGH VEL. (LONG RIFLE)	1622	36	HOLLOW POINT	1280	1010	131	82
GOLDEN BULLET CARTRIDGES, HIGH VEL. (LONG RIFLE)	*1600	36	HOLLOW POINT	1280	1010	131	82
GOLDEN BULLET CARTRIDGES, HIGH VEL. (LONG)	1322	29	LEAD	1240	962	99	60
GOLDEN BULLET CARTRIDGES, HIGH VEL. (SHORT)	1022	29	LEAD	1095	903	77	52
YELLOW JACKET HYPER VEL. 22 CARTRIDGES (LONG RIFLE)	1722	33	TRUNCATED CONE, HOLLOW POINT	1500	1075	165	85
VIPER (LONG RIFLE)®	1922	36	TRUNCATED CONE, SOLID	1410	1056	159	89

*THESE LONG RIFLE 22S AVAILABLE IN SLIDE-OPEN PLASTIC PACKS OF 100. †VALUES AT 50 YARDS.

TRAINING

As only the experts can give it.

Remington offers your department's armorers and gun maintenance people informative, certified five-day seminars at our Ilion, NY plant. Also, 2 1/2 day field schools are available in selected areas of the country. At these sessions they will get in-depth training on service, repair, troubleshooting, disassembly and reassembly of all our law enforcement shotguns and rifles. It's everything they'll need to keep your own Remington firearms in peak working order at all times.

For more information on our armorer's school, contact the Remington Law Enforcement Representative at (315) 895-3477; FAX: (315) 895-3237.

Remington, CBee, Core-Lokt, Express, Kleanbore, Power-Lokt, Premier, Slugger, Targetmaster, Viper, and Yellow Jacket are trademarks registered in the U.S. Patent & Trademark Office by Remington Arms Company, Inc. Copper Solid, DriLube, Driving Band, Flexitab, Golden, Golden Saber, High Velocity, Model 11-87, Model 40-XB, Model 700, Model 870, Rem, Rem Clean, and UMC are trademarks of Remington Arms Company, Inc., Wilmington, DE 19805. © 1995 Remington Arms Company, Inc. All rights reserved. Kevlar and Teflon are trademarks registered in the U.S. Patent & Trademark Office by E.I. du Pont de Nemours and Company. Speedfeed is a trademark registered in the U.S. Patent & Trademark Office by Speedfeed Inc. Sierra and Match King are registered trademarks of Sierra Bullets, Inc. Quick-Adjust is a trademark of Michaels of Oregon, Portland, OR. Leupold is a registered trademark of Leupold & Stevens, Inc. Vari-X and Duplex are trademarks of Leupold & Stevens, Inc., Beaverton, OR. Pelican is a registered trademark of Pelican Products, Inc., Torrance, CA.

Weights, stock dimensions, checkering pattern, and wood grain figure may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice.

Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, a free copy will be sent on your request. Please specify the model and serial number. Write Remington Arms Company, Law Enforcement and Government Sales Office, 620 Green Valley Road, Suite 304, Greensboro, NC 27408.

How to contact Remington Arms Company by phone, FAX, or TELEX:

Remington Law Enforcement
and Government Sales Office (Greensboro, NC):
Telephone, (910) 299-4032; FAX, (910) 292-3772.

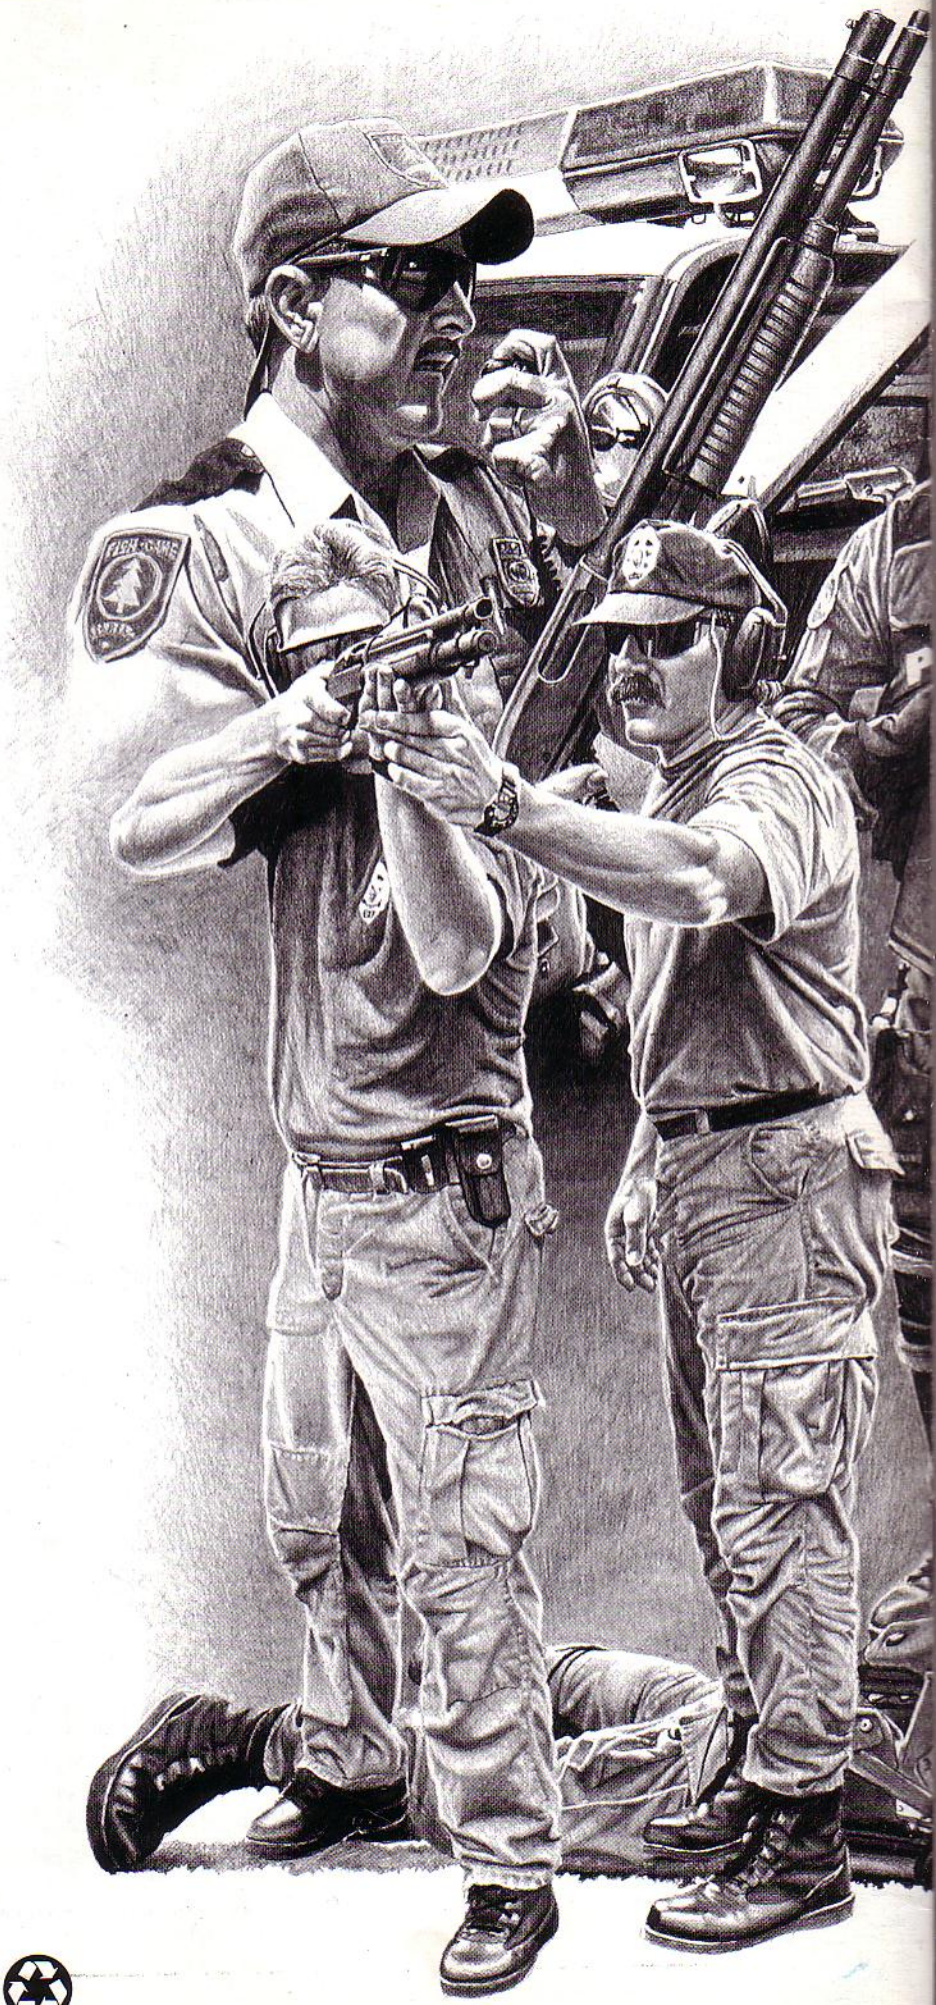

100% AMERICAN

Remington®

H-42415 1996